

ISSN 2518-1726 (Online),
ISSN 1991-346X (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
әл-Фараби атындағы Қазақ ұлттық университетінің

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Қазақстан Республикасының
Ғылым Академиясының
им. аль-Фараби

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Al-Farabi
Kazakh National University

SERIES
PHYSICO-MATHEMATICAL

1 (335)

JANUARY – FEBRUARY 2021

PUBLISHED SINCE JANUARY 1963

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series physico-mathematical journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of chemistry and technologies in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of chemical sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Физикалық-математикалық сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Химия және технология сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді химиялық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия физико-математическая» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по химическим наукам для нашего сообщества.

Б а с р е д а к т о р ы
ф.-м.ғ.д., проф., ҚР ҰҒА академигі
Ғ.М. Мұтанов

Р е д а к ц и я а л қ а с ы:

Асанова А.Т. проф. (Қазақстан)
Бошкаев К.А. PhD докторы (Қазақстан)
Байгунчеков Ж.Ж. проф., академик (Қазақстан)
Quevedo Hernando проф. (Мексика)
Жүсіпов М.А. проф. (Қазақстан)
Ковалев А.М. проф., академик (Украина)
Калимолдаев М.Н. проф., академик (Қазақстан)
Михалевич А.А. проф., академик (Белорусь)
Мырзакулов Р. проф., академик (Қазақстан)
Рамазанов Т.С. проф., академик (Қазақстан)
Такибаев Н.Ж. проф., академик (Қазақстан), бас ред. орынбасары
Тигиняну И. проф., академик (Молдова)
Уалиев З.Г. проф., чл.-корр. (Қазақстан)
Харин С.Н. проф., академик (Қазақстан)

«ҚР ҰҒА Хабарлары. Физика-математикалық сериясы».

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және коммуникациялар министрлігінің Ақпарат комитетінде
14.02.2018 ж. берілген № 16906-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

**Тақырыптық бағыты: *физика-математика ғылымдары және ақпараттық
технологиялар саласындағы басым ғылыми зерттеулерді
жариялау.***

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28; 219, 220 бөл.;

тел.: 272-13-19; 272-13-18,

<http://physics-mathematics.kz/index.php/en/archive>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2021

Типографияның мекенжайы: «NurNaz GRACE», Алматы қ., Рысқұлов көш., 103.

Главный редактор
д.ф.-м.н., проф. академик НАН РК
Г.М. Мутанов

Редакционная коллегия:

Асанова А.Т. проф. (Казахстан)
Бошкаев К.А. доктор PhD (Казахстан)
Байгунчеков Ж.Ж. проф., академик (Казахстан)
Quevedo Hernando проф. (Мексика)
Жусупов М.А. проф. (Казахстан)
Ковалев А.М. проф., академик (Украина)
Калимолдаев М.Н. проф., академик (Казахстан)
Михалевич А.А. проф., академик (Беларусь)
Мырзакулов Р. проф., академик (Казахстан)
Рамазанов Т.С. проф., академик (Казахстан)
Такибаев Н.Ж. проф., академик (Казахстан), зам. гл. ред.
Тигиняну И. проф., академик (Молдова)
Уалиев З.Г. проф., чл.-корр. (Казахстан)
Харин С.Н. проф., академик (Казахстан)

«Известия НАН РК. Серия физика-математическая».

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Собственник: РОО «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и коммуникаций Республики Казахстан № 16906-Ж, выданное 14.02.2018 г.

Тематическая направленность: *публикация приоритетных научных исследований в области физико-математических наук и информационных технологий.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28; ком. 219, 220; тел.: 272-13-19; 272-13-18,
<http://physics-mathematics.kz/index.php/en/archive>

© Национальная академия наук Республики Казахстан, 2021

Адрес типографии: «NurNaz GRACE», г. Алматы, ул. Рыскулова, 103.

Editor in chief

doctor of physics and mathematics, professor, academician of NAS RK

G.M. Mutanov

Editorial board:

Asanova A.T. prof. (Kazakhstan)

Boshkayev K.A. PhD (Kazakhstan)

Baigunchekov Zh.Zh. prof., akademik (Kazakhstan)

Quevedo Hemando prof. (Mexico)

Zhusupov M.A. prof. (Kazakhstan)

Kovalev A.M. prof., academician (Ukraine)

Kalimoldaev M.N. prof., akademik (Kazakhstan)

Mikhalevich A.A. prof., academician (Belarus)

Myrzakulov R. prof., akademik (Kazakhstan)

Ramazanov T.S. prof., akademik (Kazakhstan)

Takibayev N.Zh. prof., academician (Kazakhstan), deputy editor in chief.

Tiginyanu I. prof., academician (Moldova)

Ualiev Z.G. prof., chl.-korr. (Kazakhstan)

Kharin S.N. prof., academician (Kazakhstan)

News of the National Academy of Sciences of the Republic of Kazakhstan. Physical-mathematical series.

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Communications of the Republic of Kazakhstan **No. 16906-Ж**, issued on 14.02.2018.

Thematic scope: *publication of priority research in the field of physical and mathematical sciences and information technology.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19; 272-13-18,

<http://physics-mathematics.kz/index.php/en/archive>

© National Academy of Sciences of the Republic of Kazakhstan, 2021

Address of printing house: «NurNaz GRACE», 103, Ryskulov str, Almaty.

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

PHYSICO-MATHEMATICAL SERIES

ISSN 1991-346X

Volume 1, Number 335 (2021), 90 – 96

<https://doi.org/10.32014/2021.2518-1726.13>

UDC 681.5

IRSTI 49.01.00

N.B. Kuttybay, A.K. Saymbetov, Z.Sh. Tenizbayeva, L.B. Smail, R.M. Yerbolat

Al-Farabi Kazakh National university, Almaty, Kazakhstan.

E-mail: nurjigit.10.93@gmail.com, asaymbetov@kaznu.kz, zuhratenizbaeva@mail.ru,
smaillaura00@gmail.com, yerbolat.rm@gmail.com

**DEVELOPMENT OF AN AUTOMATED
PHOTOVOLTAIC SYSTEM WITH WIRELESS MONITORING**

Abstract. The work is devoted to the development of an efficient photovoltaic installation with automated wireless monitoring based on the LabView software. Long-distance communication technology - LoRa was used to wirelessly transmit data on the output characteristic states of the photovoltaic installation, storage battery and built-in sensors. This module operates at 433 MHz and transmits small data packets with low power consumption. This makes the stand-alone system energy efficient compared to similar wireless installations. The graphical software LabView was chosen to monitor the state of the developed system. The paper shows a block diagram of an automated wireless system, an operational algorithm of the external transmitting part of the installation, as well as electrical circuits of the transmitting and receiving control units. As a result of the work, a photovoltaic system with an automated wireless monitoring system and graphical data display was developed. The developed automated complex is more efficient and easy to use in comparison with other systems.

Key words: Wireless monitoring, solar panel, battery, current and voltage sensor.

Introduction. With the rapid development of wireless communication technologies through the use of microcontrollers and other communication devices, many industrial processes are controlled by automated systems, which in turn reduce human effort. Automated systems are managed and monitored via wired and wireless communication networks. Wireless automated systems - a complex of software and hardware that enables computer systems and communication devices to function without human intervention. The operations of an automated system are part of the automatic control of a system in which the processes are fully automated with support for control loops and special logic [1-3].

The use of wireless automated systems saves labor, time and money, increasing the accuracy of the work performed. This increases the availability, performance, and reliability of the services provided. Today, the use of such installations in photovoltaic systems is one of the most promising areas. Wireless monitoring is considered an important aspect to monitor the stability and performance of a photovoltaic system. The photovoltaic monitoring system can be used in solar-powered cars, solar-powered buses, solar-powered trains, etc. [4].

In the articles [5,6], the authors designed the design of a simple, cost-effective and low-power wireless monitoring system for photovoltaic installations. XBee RF modules were chosen as wireless receiving and transmitting devices. Also, based on the ZigBee and LoRa wireless modules, research works were carried out for online monitoring of the photovoltaic system [7-11].

The software of the automated system is an important part of this research work. In scientific articles [12-17], monitoring systems based on LabView software were developed. The authors claim that the LabView program can accurately monitor the state of sensors in real time.

Analyzing these materials, we can say that all the developed systems are aimed at improving energy efficiency, reducing the proportion of human intervention in the workflow.

This article presents an automated system of photovoltaic installations with wireless monitoring based on LabView software. The LoRa wireless module was chosen to build the communication network. As a

result of the research work, an automated photovoltaic system with wireless monitoring was built, and an algorithm for the operation of the General system was developed. Experimental data on the effectiveness of the developed system were obtained.

Design of an automated photovoltaic system with wireless monitoring.

Block diagram of an automated system with wireless monitoring. The block diagram of an automated system with wireless monitoring is shown in figure 1. The photovoltaic installation (1) is controlled through the control unit (2). Control electronic unit contains a programmable logic controller, where the algorithm of operation of the general installation is loaded. The generated electrical energy is stored in the battery pack (3). The batteries are charged using the battery charge controller. At the output of the solar panel, as well as at the output of the battery charge controller, an ammeter and voltmeter (4) are installed, which measure the output electrical characteristics of the devices, transmits data to the microcontroller (5). The microcontroller, in turn, after processing all the received data, sends the data to dispatcher via the wireless module LoRa E32 (6). At the receiving part of the dispatcher device also has a wireless module E32 LoRa (8). The communication channel between the receiver and the transmitter (7) is publicly available on the territory of the Republic of Kazakhstan. The wireless receiving module is directly connected via a USB 2.0 cable to a personal computer (9), where you can monitor the overall operation of the installation using LabView software.

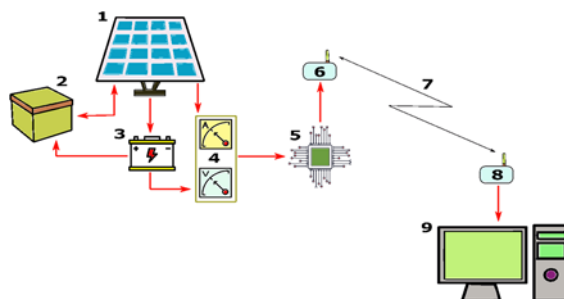


Figure 1 – Structure of the automated wireless monitoring system

Control electronic unit of the system. Figure 2 shows the electronic components of the transmitting and receiving parts of the automated wireless monitoring system. Figure 2 a shows an 8-bit Atmega328PU (1) microcontroller, which uses the developed algorithm to control all electronic components in the device. The unit is powered by a 12 V battery (4), via a voltage stabilizer LM7805 (3). The output electrical values of the solar panel (8) and the battery charge controller (7) are measured through an ACS712 ammeter (5) and a voltmeter made on the basis of a voltage divider (6). The data received from the sensors is processed in the microcontroller and sent to the dispatcher via the LoRa E32 (2) wireless module.

Figure 2 b shows the electrical diagram of the receiving part (dispatcher) of the system. Here, the LoRa E32 wireless module (2) and the Atmega328 PU microcontroller (1) are connected to the personal computer via USB 2.0 (3) cables.

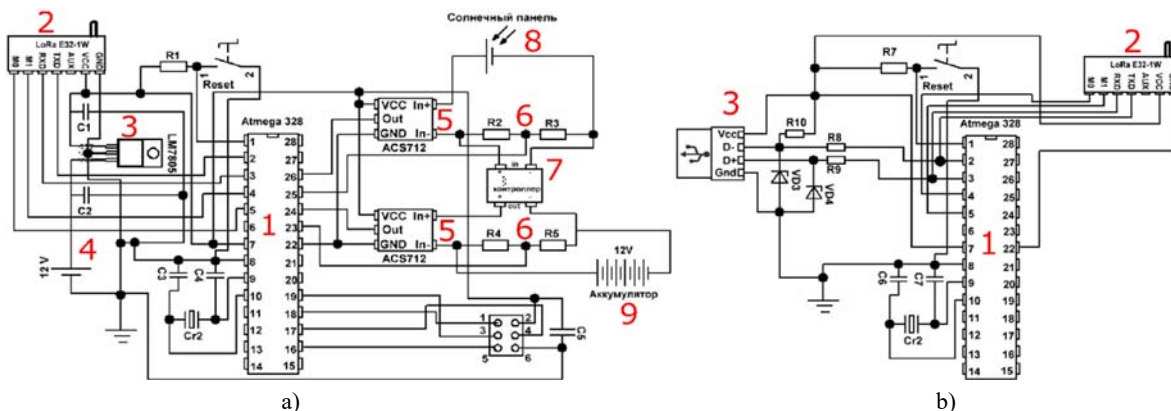


Figure 2 – Electronic components of an automated wireless monitoring system: a) transmitting part; b) receiving part

Algorithm of the general system operation. Figure 3 shows the algorithm of the automated wireless monitoring system.

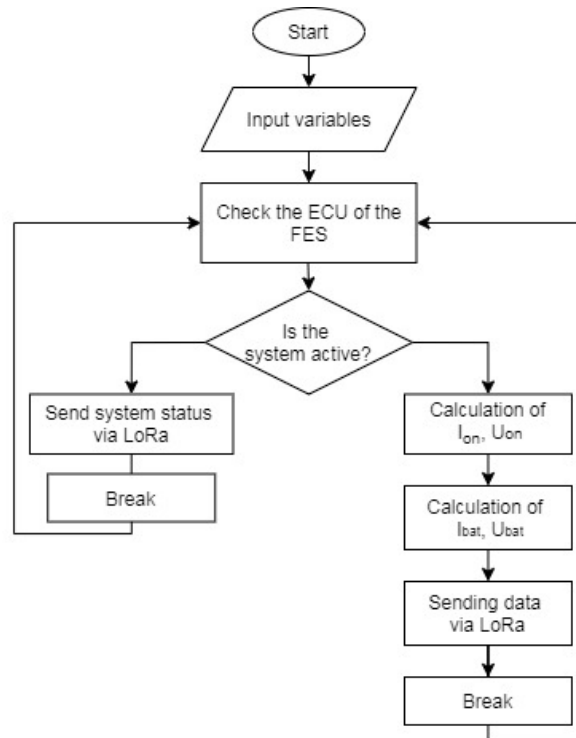


Figure 3 – Algorithm of operation of the automated wireless monitoring system

The built-in microcontroller works according to the specified software algorithm. At the first stage of the system operation, the microcontroller enters the operating mode. Next, enter the desired i/o ports of the microcontroller and variables. After that, the controller checks the activity of the electronic control unit (ECU) of the photovoltaic system (FES). If the system has not yet been activated, the controller sends a packet about the disabled state of the system and goes into sleep mode for a certain time. And if the system has switched to operating mode, the microcontroller takes measurements using the installed sensors and sends them to the dispatcher via the LoRa E32 wireless module. Then the microcontroller goes into sleep mode for a certain time.

Results and discussion. The monitoring interface of the automated wireless photovoltaic system was built on the basis of the LabView graphical software. As a result of the experiment, the electrical characteristics of the solar panel and battery were obtained and displayed on the dispatcher's monitor. Figure 4 shows the interface (front panel) of a wireless automated system.

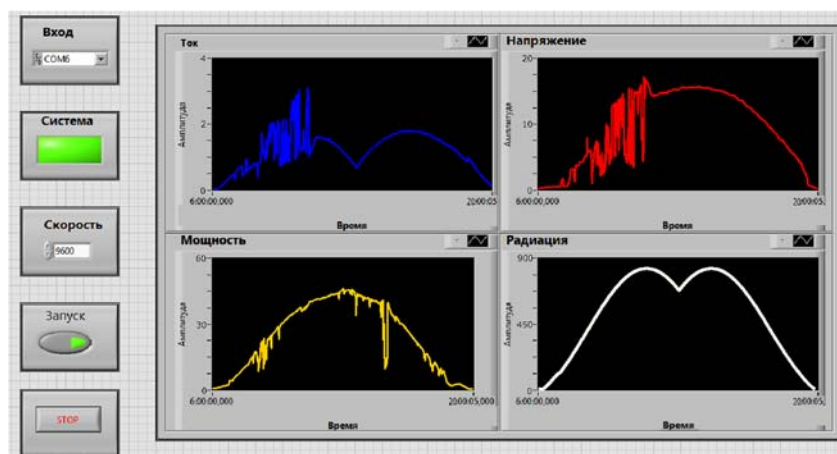


Figure 4 – Wireless monitoring system interface

The main window contains the input port, where you can select the port number of the computer connected to the external device. If the system is activated, the monitor indicator will turn green. Next, the speed of information exchange between the device and the computer is set. Below are the locking buttons for starting and interrupting the system. On the right side of the monitor are graphical indicators that show the electrical characteristics of the system: the current and voltage of the solar panel, the power of the solar panel, and the level of solar radiation W/m^2 . All data obtained as a result of the experiment will be automatically saved in text format on the local PC.

Figure 5 shows the graphical (virtual) elements of the LabView program connected between (block diagram).

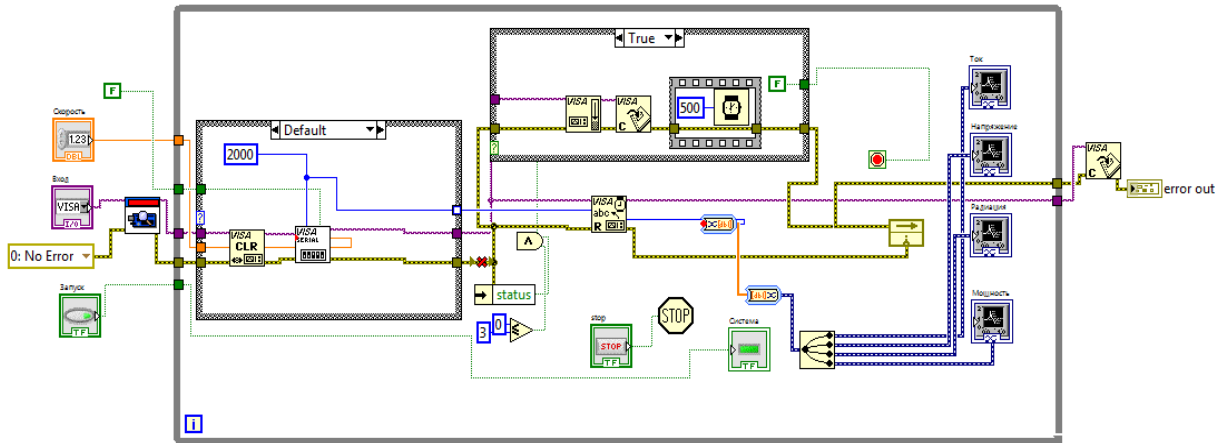


Figure 5 – Block diagram of LabView program

Separate graphs from the LabView program are shown below. Figure 6 shows a graph of the current and voltage generated at the output of a photovoltaic panel during one day. Here, the red line indicates the voltage, and the blue line indicates the current of the photovoltaic panel.

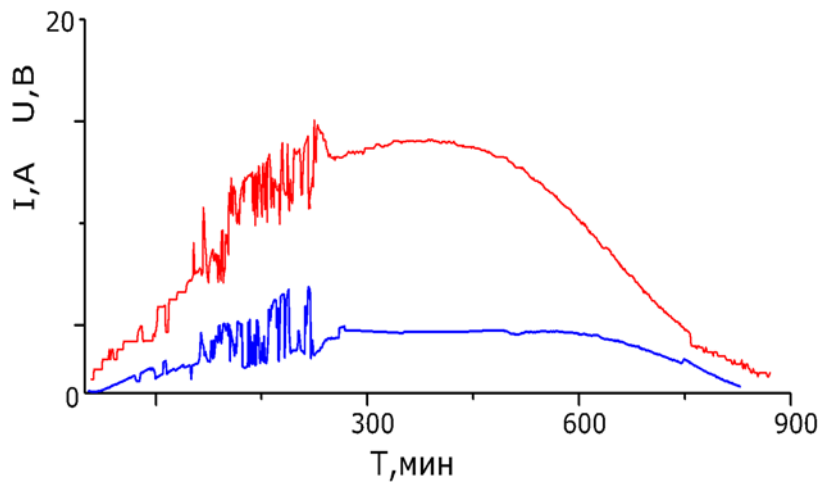


Figure 6 – Graph of the current and voltage of the photovoltaic panel

Figure 7 shows a graph of solar radiation over a single day. Since our radiation sensor is mounted on a single-axis tracker, you can see from the graph that in the middle of the day, the energy decreases due to the height of the sun coordinate location.

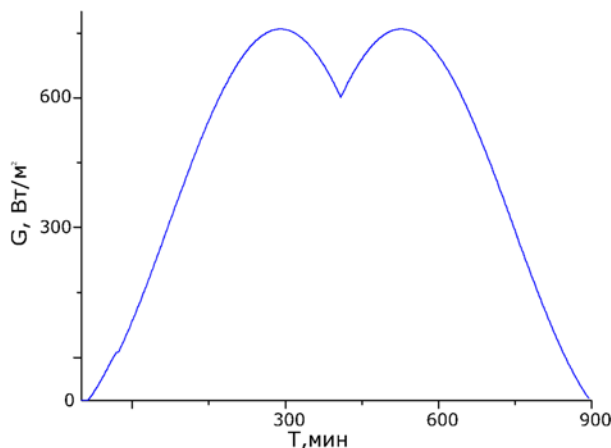


Figure 7 – Graph of solar radiation

Conclusion. During the research work, an automated wireless monitoring system for the photovoltaic system was developed and manufactured using an interface based on the LabView software. Data on the generation of solar energy and solar radiation during the day were obtained in the form of graphs in the LabView environment. The developed automated system reduces human involvement in the monitoring process and is easy to use. Installed electronic components consume a small amount of energy.

Н.Б. Құттыбай, А.К. Саймбетов, З.Ш. Теңізбаева, Л.Б.Смаил, Р.М. Ерболат

Әл-Фараби атындағы Қазақ ұлттық университеті, Алматы, Қазақстан

СЫМСЫЗ МОНИТОРИНГ НЕГІЗІНДЕГІ АВТОМАТТАНДЫРЫЛҒАН ФОТОЭЛЕКТРЛІК ЖҮЙЕ ЖАСАУ

Аннотация. Ғылыми жұмыс LabView бағдарламалық жасақтама негізінде құрылған автоматтандырылған сымсыз бақылауы бар тиімді фотоэлектрлік қондырғыны әзірлеуге арналған. Фотоэлектрлік қондырғының шығыс сипаттамасын, аккумуляторлы батареяның және орнатылған сенсорлы құрылғылар күйін сымсыз байланыс жүйесі арқылы жіберу үшін LoRa ұзақ қашықтықтағы байланыс технологиясы қолданылды. Бұл модуль 433 МГц жиілікте жұмыс істейді және электр қуатын азырақ тұтыну арқылы шағын деректер пакетін жібере алады. Бұл ұқсас сымсыз қондырғылармен салыстырғанда автономды жүйені энергияны үнемдейді.

Әзірленген жүйенің күйін бақылау үшін LabVIEW графикалық бағдарламалық жасақтама таңдалды. Жұмыста автоматтандырылған сымсыз жүйенің блок-схемасы, қондырғының сыртқы ақпарат тарату бөлігінің жұмыс алгоритмі, сондай-ақ басқару блоктары, қабылдау-тарату бөлігі, электр схемалары көрсетілген. Жұмыс нәтижесінде автоматтандырылған сымсыз бақылау жүйесі және деректерді графикалық түрде көрсететін фотоэлектрлік жүйе жасалды. Сондай-ақ, бір күн ішінде фотоэлектрлік панельдің шығысында пайда болатын күн радиациясы, ток және кернеу графиктері алынды. Әзірленген автоматтандырылған кешен басқа жүйелермен салыстырғанда тиімдірек және қолдануға оңай. Автоматтандырылған кешен адамның мониторинг үдерісіне қатысуын азайтады. Орнатылған электрондық компоненттер аз мөлшерде энергия тұтынады.

Түйін сөздер: сымсыз мониторинг, күн панелі, аккумулятор, ток пен кернеу құрылғылары.

Н.Б. Құттыбай, А.К. Саймбетов, З.Ш. Тенизбаева, Л.Б. Смаил, Р.М. Ерболат

Казахский национальный университет имени аль-Фараби, Алматы, Казахстан

РАЗРАБОТКА АВТОМАТИЗИРОВАННОЙ ФОТОЭЛЕКТРИЧЕСКОЙ СИСТЕМЫ С БЕСПРОВОДНЫМ МОНИТОРИНГОМ

Аннотация. Работа посвящена разработке эффективной фотоэлектрической установки с автоматизированным беспроводным мониторингом на основе программного обеспечения LabView. Для осуществление беспроводной передачи данных состояний выходной характеристики фотоэлектрической установки,

аккумуляторной батареи и встроенных датчиков использовалась технология связи на большие расстояния – LoRa. Данный модуль работает на частоте 433 МГц и передает небольшие пакеты данных с невысоким энергопотреблением. Это делает автономную систему энергоэффективной по сравнению с аналогичными беспроводными установками.

Для мониторинга состояние разработанной системы было выбрано графическое программное обеспечение LabView. В работе показана блок-схема автоматизированной беспроводной системы, алгоритм работы внешней передающей части установки, а также электрические схемы приемо-передающей части блоков управления. В результате работы была разработана фотоэлектрическая система с автоматизированной беспроводной системой мониторинга и графическим отображением данных. Также были взяты отдельные графики солнечной радиации, тока и напряжение, генерируемое на выходе фотоэлектрической панели в течение одного дня. Разработанный автоматизированный комплекс по сравнению с остальными системами является более эффективным и простым в использовании. Автоматизированный комплекс снижает вовлеченность человека в процесс мониторинга. Установленные электронные компоненты потребляют незначительное количество энергии.

Ключевые слова: беспроводной мониторинг, солнечная панель, аккумулятор, датчики тока и напряжение.

Information about authors:

Kuttybay N.B., Senior Lecturer, al-Farabi Kazakh National university, Almaty, Kazakhstan; nurjigit.10.93@gmail.com; <https://orcid.org/0000-0002-5723-6642>;

Saymbetov A.K., Associate professor, al-Farabi Kazakh National university, Almaty, Kazakhstan; ahmet.saymbetov@kaznu.kz; <https://orcid.org/0000-0003-3442-8550>;

Tenizbayeva Z.Sh., Master's degree student, al-Farabi Kazakh National university, Almaty, Kazakhstan; zuhratenizbaeva@mail.ru; <https://orcid.org/0000-0002-7449-1901>;

Smail L.B., Master student, al-Farabi Kazakh National university, Almaty, Kazakhstan; smailla00@gmail.com; <https://orcid.org/0000-0002-3750-2747>;

Yerbolat R.M., Master student, al-Farabi Kazakh National university, Almaty, Kazakhstan; yerbolat.rm@gmail.com; <https://orcid.org/0000-0003-4630-7094>

REFERENCES

[1] Nikolidakis, S. A., Kandris, D., Vergados, D. D., & Douligeris, C. (2015). Energy efficient automated control of irrigation in agriculture by using wireless sensor networks. *Computers and Electronics in Agriculture*, 113, 154-163. <https://doi.org/10.1016/j.compag.2015.02.004>

[2] Kuttybay, N., Mekhilef, S., Saymbetov, A., Nurgaliyev, M., Meir Khanov, A., Dosymbetova, G., & Kopzhan, Z. (2019, June). An automated intelligent solar tracking control system with adaptive algorithm for different weather conditions. In 2019 IEEE international conference on automatic control and intelligent systems (I2CACIS) (pp. 315-319). IEEE. DOI: 10.1109/I2CACIS.2019.8825098

[3] Saymbetov, A. K., Nurgaliyev, M. K., Nalibayev, Y. D., Kuttybay, N. B., Svanbayev, Y. A., Dosymbetova, G. B., ... & Gaziz, K. A. (2018, August). Intelligent energy efficient wireless communication system for street lighting. In 2018 International conference on computing and network communications (CoCoNet) (pp. 18-22). IEEE. DOI: 10.1109/CoCoNet.2018.8476893

[4] Sarkar, T., Sharma, M., & Gawre, S. K. (2014, March). A generalized approach to design the electrical power system of a solar electric vehicle. In 2014 IEEE Students' Conference on Electrical, Electronics and Computer Science (pp. 1-6). IEEE. DOI: 10.1109/SCEECS.2014.6804490

[5] Sabry, A. H., Hasan, W. Z. W., Kadir, M. A., Radzi, M. A. M., & Shafie, S. (2018). Wireless monitoring prototype for photovoltaic parameters. *Indonesian Journal of Electrical Engineering and Computer Science*, 11(1), 9-17. DOI: 10.11591/ijeecs.v11.i1.pp9-17

[6] Sabry, A. H., Hasana, W. Z. W., Kadir, M. A., Radzi, M. A. M., & Shafie, S. (2017, November). Low cost wireless sensor monitoring system for photovoltaic (PV) array parameters. In 2017 IEEE 4th International Conference on Smart Instrumentation, Measurement and Application (ICSIMA) (pp. 1-6). IEEE. DOI: 10.1109/ICSIMA.2017.8312010

[7] Shariff, F., Abd Rahim, N., & Hew, W. P. (2015). Zigbee-based data acquisition system for online monitoring of grid-connected photovoltaic system. *Expert Systems with Applications*, 42(3), 1730-1742. <https://doi.org/10.1016/j.eswa.2014.10.007>

[8] Ranhotigamage, C., & Mukhopadhyay, S. C. (2011). Field trials and performance monitoring of distributed solar panels using a low-cost wireless sensors network for domestic applications. *IEEE Sensors Journal*, 11(10), 2583-2590. DOI: 10.1109/JSEN.2011.2150214

[9] López, M. E. A., Mantiñan, F. J. G., & Molina, M. G. (2012, September). Implementation of wireless remote monitoring and control of solar photovoltaic (PV) system. In 2012 Sixth IEEE/PES Transmission and Distribution: Latin America Conference and Exposition (T&D-LA) (pp. 1-6). IEEE. DOI: 10.1109/TDC-LA.2012.6319050

[10] Nurgaliyev, M., Saymbetov, A., Yashchysyn, Y., Kuttybay, N. and Tukymbekov, D., 2020. Prediction of energy consumption for LoRa based wireless sensors network. *Wireless Networks*, 26(5), 3507–3520. <https://doi.org/10.1007/s11276-020-02276-5>

[11] Yujie, H., & Xihuang, Z. (2011, October). Research and application of pv monitoring system based on zigbee and gprs. In 2011 10th International Symposium on Distributed Computing and Applications to Business, Engineering and Science (pp. 338-342). IEEE. DOI: 10.1109/DCABES.2011.74

[12] Joseph, A., Vasanthi, D., & John, M. (2018, December). Low Cost Embedded Design for Wireless Remote Monitoring of Measurement Data in LabVIEW. In 2018 International Conference on Circuits and Systems in Digital Enterprise Technology (ICCSDET) (pp. 1-9). IEEE. DOI: 10.1109/ICCSDET.2018.8821064

[13] Ma, T., Du, F., & Fang, C. (2011). Sensors state monitoring based on labview and wireless nodes. *Procedia Engineering*, 15, 2639-2643. <https://doi.org/10.1016/j.proeng.2011.08.496>

[14] Rezk, H., Tyukhov, I., Al-Dhaifallah, M., & Tikhonov, A. (2017). Performance of data acquisition system for monitoring PV system parameters. *Measurement*, 104, 204-211. <https://doi.org/10.1016/j.measurement.2017.02.050>

[15] Upadhye, M. Y., Borole, P. B., & Sharma, A. K. (2015, May). Real-time wireless vibration monitoring system using LabVIEW. In 2015 International Conference on Industrial Instrumentation and Control (ICIC) (pp. 925-928). IEEE. DOI: 10.1109/IIC.2015.7150876

[16] Visan, D. A., & Lita, I. (2011, October). Multipoint wireless measurement system with LabVIEW interface. In 2011 IEEE 17th International Symposium for Design and Technology in Electronic Packaging (SIITME) (pp. 269-272). IEEE. DOI: 10.1109/SIITME.2011.6102733

[17] Kuttybay, N., Saymbetov, A., Mekhilef, S., Nurgaliyev, M., Tukymbekov, D., Dosymbetova, G., Meirkhanov, A. and Svanbayev, Y., 2020. Optimized Single-Axis Schedule Solar Tracker in Different Weather Conditions. *Energies*, 13(19), p.5226. <https://doi.org/10.3390/en13195226>.

Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

(Правила оформления статьи для публикации в журнале смотреть на сайтах:

www.nauka-nanrk.kz

<http://physics-mathematics.kz/index.php/en/archive>

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Редакторы: *М. С. Ахметова, Д. С. Аленов, А. Ахметова*
Верстка на компьютере *А.М. Кульгинбаевой*

Подписано в печать 08.02.2021.
Формат 60x881/8. Бумага офсетная. Печать – ризограф.
6,75 п.л. Тираж 300. Заказ 1.