

ISSN 2518-1726 (Online),
ISSN 1991-346X (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
Әль-фараби атындағы Қазақ ұлттық университетінің

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Қазақстан Республикасының
Ғылым Академиясының
Әль-Фараби атындағы
Қазақ ұлттық университетінің

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Al-farabi kazakh
national university

SERIES
PHYSICO-MATHEMATICAL

3 (325)

MAY - JUNE 2019

PUBLISHED SINCE JANUARY 1963

PUBLISHED 6 TIMES A YEAR

ALMATY, KAZAKHSTAN

Б а с р е д а к т о р ы
ф.-м.ғ.д., проф., ҚР ҰҒА академигі **Ғ.М. Мұтанов**

Р е д а к ц и я а л қ а с ы:

Жұмаділдаев А.С. проф., академик (Қазақстан)
Кальменов Т.Ш. проф., академик (Қазақстан)
Жантаев Ж.Ш. проф., корр.-мүшесі (Қазақстан)
Өмірбаев У.У. проф. корр.-мүшесі (Қазақстан)
Жүсіпов М.А. проф. (Қазақстан)
Жұмабаев Д.С. проф. (Қазақстан)
Асанова А.Т. проф. (Қазақстан)
Бошқаев К.А. PhD докторы (Қазақстан)
Сұраған Д. корр.-мүшесі (Қазақстан)
Quevedo Hernando проф. (Мексика),
Джунушалиев В.Д. проф. (Қырғыстан)
Вишневский И.Н. проф., академик (Украина)
Ковалев А.М. проф., академик (Украина)
Михалевич А.А. проф., академик (Белорус)
Пашаев А. проф., академик (Әзірбайжан)
Такибаев Н.Ж. проф., академик (Қазақстан), бас ред. орынбасары
Тигиняну И. проф., академик (Молдова)

«ҚР ҰҒА Хабарлары. Физика-математикалық сериясы».

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.)
Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде
01.06.2006 ж. берілген №5543-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік

Мерзімділігі: жылына 6 рет.
Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
<http://physics-mathematics.kz/index.php/en/archive>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2019

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Главный редактор
д.ф.-м.н., проф. академик НАН РК **Г.М. Мутанов**

Редакционная коллегия:

Джумадильдаев А.С. проф., академик (Казахстан)
Кальменов Т.Ш. проф., академик (Казахстан)
Жантаев Ж.Ш. проф., чл.-корр. (Казахстан)
Умирбаев У.У. проф. чл.-корр. (Казахстан)
Жусупов М.А. проф. (Казахстан)
Джумабаев Д.С. проф. (Казахстан)
Асанова А.Т. проф. (Казахстан)
Бошкаев К.А. доктор PhD (Казахстан)
Сураган Д. чл.-корр. (Казахстан)
Quevedo Hernando проф. (Мексика),
Джунушалиев В.Д. проф. (Кыргызстан)
Вишневский И.Н. проф., академик (Украина)
Ковалев А.М. проф., академик (Украина)
Михалевич А.А. проф., академик (Беларусь)
Пашаев А. проф., академик (Азербайджан)
Такибаев Н.Ж. проф., академик (Казахстан), зам. гл. ред.
Тигиняну И. проф., академик (Молдова)

«Известия НАН РК. Серия физико-математическая».

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Собственник: РОО «Национальная академия наук Республики Казахстан» (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов
Министерства культуры и информации Республики Казахстан №5543-Ж, выданное 01.06.2006 г.

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://physics-mathematics.kz/index.php/en/archive>

© Национальная академия наук Республики Казахстан, 2019

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75.

E d i t o r i n c h i e f
doctor of physics and mathematics, professor, academician of NAS RK **G.M. Mutanov**

E d i t o r i a l b o a r d:

Dzhumadildayev A.S. prof., academician (Kazakhstan)
Kalmenov T.Sh. prof., academician (Kazakhstan)
Zhantayev Zh.Sh. prof., corr. member. (Kazakhstan)
Umirbayev U.U. prof. corr. member. (Kazakhstan)
Zhusupov M.A. prof. (Kazakhstan)
Dzhumabayev D.S. prof. (Kazakhstan)
Asanova A.T. prof. (Kazakhstan)
Boshkayev K.A. PhD (Kazakhstan)
Suragan D. corr. member. (Kazakhstan)
Quevedo Hernando prof. (Mexico),
Dzhunushaliyev V.D. prof. (Kyrgyzstan)
Vishnevskiy I.N. prof., academician (Ukraine)
Kovalev A.M. prof., academician (Ukraine)
Mikhalevich A.A. prof., academician (Belarus)
Pashayev A. prof., academician (Azerbaijan)
Takibayev N.Zh. prof., academician (Kazakhstan), deputy editor in chief.
Tiginyanu I. prof., academician (Moldova)

News of the National Academy of Sciences of the Republic of Kazakhstan. Physical-mathematical series.

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 5543-Ж, issued 01.06.2006

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://physics-mathematics.kz/index.php/en/archive>

© National Academy of Sciences of the Republic of Kazakhstan, 2019

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

PHYSICO-MATHEMATICAL SERIES

ISSN 1991-346X

<https://doi.org/10.32014/2019.2518-1726.36>

Volume 3, Number 325 (2019), 166 – 175

УДК 539.17

B.K. Kozhakhmet¹, G.G. Kulikov², G.S. Nurbakova¹, S.B. Rustembayeva¹

¹Kazakh National University named after al-Farabi, Almaty, Kazakhstan;

²National Research Nuclear University “MEPHI”, Moscow, Russia

bauyr.ko@gmail.com, GeGKulikov@rosatom.ru, g.nurbakova@gmail.com, rustembayeva@gmail.com

**USE OF MOLYBDENUM AS A STRUCTURAL MATERIAL
OF FUEL ELEMENTS IN LEAD OR LEAD-BISMUTH EUTECTIC
COOLED FAST REACTOR TO IMPROVE ITS SAFETY**

Abstract. In our previous works has been described that the mean prompt neutron lifetime in fast reactors can be significantly elongated [1,2]. But if the last parameter is not comparable with the time required for the heat generated in the fuel elements to transport from a fuel to a coolant, feedback on the effect of changes in coolant parameters on reactivity during this time will not have time to manifest. Here was studied that the thermal constants of fuel elements can be shortened by using molybdenum as a structural material of fuel elements. Other aspects related to the use of molybdenum in nuclear reactors have also been studied.

When performing the study the neutron-physical properties of isotopes of natural molybdenum (nuclear data library JENDL-4.0) and thermal properties of metallic molybdenum were used.

The following results were obtained:

1. A method for reducing the thermal constant of fuel elements for light water and fast reactors by using dispersion fuel in cylindrical fuel rods containing, for example, granules of metallic U-Mo-alloy into Mo-matrix was proposed.

2. The necessity of molybdenum enrichment by weakly absorbing isotopes was shown.

3. Total use of isotopic molybdenum will be more than 50%.

4. Mo has a good corrosion resistance to Pb and Pb-Bi eutectic

A decrease in thermal constants of fuel elements, in combination with an increase in the mean prompt neutron lifetimes in the absence of the heat transfer crisis in fast reactors, can be promising way for a better reactor operation safety even under the conditions of the prompt neutron excursions.

Keywords: improvement of fast reactor safety, physic-mechanical characteristics of molybdenum, thermal constant of fuel elements, corrosion resistance in lead and LBE.

Introduction

It is well known fact that the safety of nuclear reactor in the case of introduction of reactivity comparable with delayed neutrons fraction depends largely on the properties of fuel and materials constituting fuel element [3]. Sharp reactivity increase initiates neutron flash, which is suppressed by means of feedback due to fuel heating and increase of neutron absorption by fertile nuclide (²³⁸U or ²³²Th) thanks to the Doppler effect. If there is enough time for heat transfer from fuel to coolant then there would be feedback caused by heating of the coolant. This second feedback depends largely on thermal-physical characteristics of the fuel element and materials constituting it.

As is known, a refractory material based on molybdenum is characterized by good thermal-physical properties [4]. Therefore, such a material appears to be attractive when using dispersion fuel elements with good heat-conducting molybdenum matrix. However, there are some difficulties to use such a material in the reactor core. Firstly, molybdenum of a natural isotopic composition is quite a strong absorber of neutrons. Secondly, it is necessary to take into account its compatibility with fuel material on the one hand and with coolant on the other hand. Resolving these issues is the subject of the present paper.

Physico – mechanical characteristics of molybdenum and some peculiarities of its nuclear – physical properties

Natural isotopic composition of molybdenum and some peculiarities of its nuclear-physical properties

Natural isotopic composition of molybdenum is represented by seven stable isotopes with mass numbers 92, 94–98, and 100, of which ^{98}Mo is the most common (23.75%).

Molybdenum has a favorable complex of physico - mechanical characteristics, due to which it is one of the best structural metals (Table 1).

Table 1 - Physico-mechanical characteristics of molybdenum

Characteristic	unit of measurement	Value
Crystal cell, α_0	nm	0,314737
Atomic radius r_a	nm	0,139
Atomic volume Ω	m^3/mole	9,42E-06
Atomic mass A	a.t.u.	95,941
Ionization potential U	eV	7,29
Density at 20 $^{\circ}\text{C}$ ρ	kg/m^3	10,2E+03
Melting temperature T_{melt}	$^{\circ}\text{C}$	2587(2625)
Boiling temperature T_{boiling}	$^{\circ}\text{C}$	5227
Specific heat of fusion L_m	J/kg	0,382
Specific heat of evaporation L at T_{boiling}	J/kg	6,191
Thermal conductivity at 20 $^{\circ}\text{C}$ λ	$\text{W}/(\text{m}^{\circ}\text{K})$	162
Heat capacity at 20 $^{\circ}\text{C}$ C_e	$\text{J}/(\text{kg}^{\circ}\text{K})$	240-250
Thermal expansion at 20 $^{\circ}\text{C}$ α_t	K^{-1}	5,1-5,2E-06
Vapor pressure при T_{melt}	Pa	2,94(3,47)E-02
Electrical resistivity at 20 $^{\circ}\text{C}$ ρ_e	$\text{Om}^{\circ}\text{m}$	5,0-5,7E-08
Magnetic susceptibility при 20 $^{\circ}\text{C}$ χ_{ms}	m^3/kg	0,82-0,93E-09
Electron work function A	eV	4,33
Emissivity on a smooth surface ρ		0,4
Modulus of normal elasticity at 20 $^{\circ}\text{C}$	kgs/mm^2	32000
Shear modulus at 20 $^{\circ}\text{C}$	kgs/mm^2	12200

Important advantages of Mo are its high values of melting point, normal elasticity modulus and thermal conductivity with a relatively low density and low coefficient of linear expansion [5,6,7,8,9,10,11]. Since the density of Mo (10200 kg / m³) is almost two times less than the density of W (19300 kg / m³), the Mo-based alloys have a much higher specific strength (at temperatures below 1370 $^{\circ}\text{C}$). Molybdenum has a rather low neutron capture cross section; the capture values of some molybdenum isotopes, in the thermal spectrum is smaller than the zirconium (zirconium alloys are used as a basic structural material in the core of thermal reactors) capture cross-section ($\sigma_{(n,y)\text{thermal}}(\text{Zr}) = 0.18$ barn), and in the fast spectrum is smaller than iron capture cross-section ($\sigma_{(n,y)1\text{ MeV}}(\text{Fe}) = 0.06$ barn) (Table 2) [12,13]. Mo has good heat resistance and high radiation resistance [14,15,16], it is characterized by high corrosion resistance in most alkaline solutions, in liquid metals, as well as in sulfuric, hydrochloric and hydrofluoric acids at different temperatures and concentrations.

Table 2: Isotopic composition and radiative neutron capture cross-sections of molybdenum at thermal point ($E_n = 0.025$ eV) and in the fast spectrum

Nuclide, atomic number of molybdenum isotope	Natural composition [%]	nuclei concentration ρ , $1\text{-E}24\text{ cm}^{-3}$	$\sigma_{(n,y)}$, barn ($E_n=0,0253$ eV)	$\sigma_{(n,y)}$, barn ($E_n=1$ MeV)
Monat		0,06403	2,55	0,035
92	14,8		0,019	0,033
94	9,3		0,015	0,036
95	15,9		14	0,054
96	16,7		0,5	0,028
97	9,6		2,1	0,055
98	24,1		0,13	0,028
100	9,6		0,199	0,017

At the same time molybdenum of a natural isotopic composition is characterized by a significantly larger neutron capture cross-section in the thermal energy range

It means that technology of isotopic enrichment should be applied in order to use molybdenum as a construction material in thermal reactors. It can be seen from the table that isotopes ^{92}Mo and ^{94}Mo account for almost a quarter of the natural material and are located on the “light” end of isotopes natural mixture. Their mixture provides about the same neutron capture cross-section as natural zirconium does. Isotope ^{95}Mo provides a dominant contribution to the total capture cross-section, the atomic weight of which is intermediate in molybdenum isotopic composition. Use of ^{98}Mo and ^{100}Mo is not excluded, of course. Dependence of capture cross-section of these light and heavy isotopes of molybdenum on neutron energy is shown in figures 1 and 2 (here reactor energy range is considered). One can see that capture cross-section is generally inversely proportional to neutron velocity, and, generally speaking, the resonance integral is more than an order of magnitude smaller than that of ^{238}U [12].

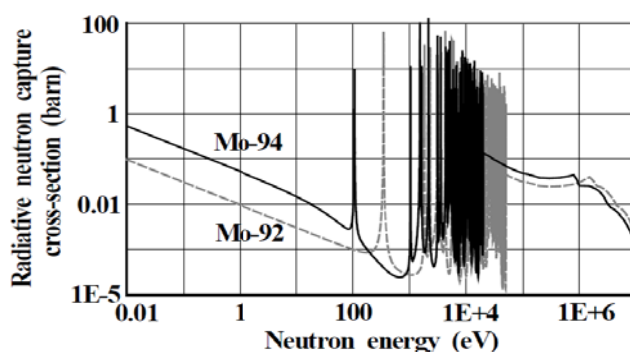


Figure 1: Radiative neutron capture cross-section of molybdenum isotopes ^{92}Mo and ^{94}Mo on neutron energy (nuclear data library JENDL-4.0)

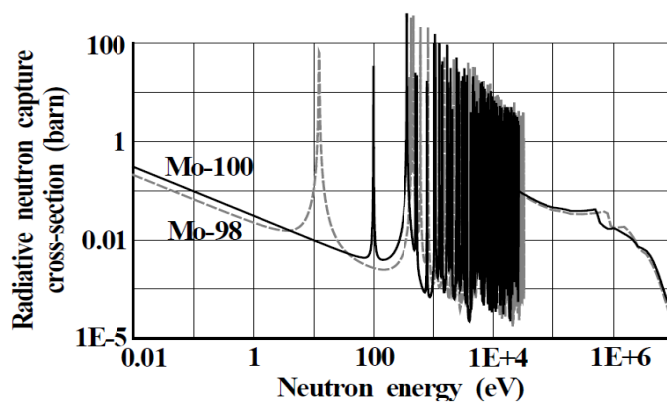


Figure 2: Radiative neutron capture cross-section of molybdenum isotopes ^{98}Mo and ^{100}Mo on neutron energy (nuclear data library JENDL-4.0)

Isotopic enrichment of molybdenum for medical purposes and for reducing its radiative neutron capture.

As is known, the isotopic enrichment is a high-level technology requiring the use of multi-step separation cascades, and therefore is very expensive. However, for the case of production of enriched molybdenum there is one important factor that can significantly facilitate the solution of this issue.

There is already a commercial enrichment of molybdenum [17] with the production of the desired isotopes ^{98}Mo and ^{100}Mo for medical diagnosis of early formation of cancerous tumors. Currently, the diagnosis is the most advanced in the world in the field of medicine and, therefore, the need for these heavy isotopes of molybdenum is high and continues to rise.

Keeping this fact in mind, it can be assumed that the process of obtaining molybdenum enriched by the light isotopes $^{92+94}\text{Mo}$ can be successfully combined with the process of producing heavy isotopes ^{98}Mo and ^{100}Mo . Heavy isotopes are the product at one end of enrichment cascade, while light isotopes are

the product at the other end. Of course, the structure of the cascade requires to be changed to get rid of the strong neutron absorber - isotope ^{95}Mo , atomic weight of which is intermediate in a series of atomic weights. Since this isotope is in the middle of the spectrum of the atomic weights of molybdenum natural isotopes (see table 1), a cascade of isotope separation with additional selection in the middle of the cascade should be used. This problem is considered in [17].

Thermo – physical parameters of metallic molybdenum, important for use as a structural material of the fuel element

Table 3. Shows some thermo-physical parameters of molybdenum and zirconium that are important for heat transfer in the fuel element [4, 12, 18].

Table 3 - Nuclear-physical and thermo-physical properties of fuel and structural materials.
^aGranules – U-9%Mo; matrix – Mo; the proportion of granules $V_f = 0.5$

Material	Density [g/cm ³] (20°C)	T_{melting} [°C]	Heat capacity [10 ⁷ J/(m ³ ·K)]	Thermal conductivity [W/(m·K)] (1000°K)	Time constant of cylindrical fuel element (rod) τ_{th} [s] (d = 9.1 mm)
Zr	6.5	1855	0.23	21.5	0.36
Mo	10.22	2623	0.30	112	0.20
U-9%Mo	17.6	1300	0.35	40	0.36
Dispersion fuel ^a	-	-	0.32	71.5	0.26

Apart from the fact that molybdenum has a melting point substantially greater, it also has a more than 5 times greater coefficient of thermal conductivity. Model fuel element of metallic molybdenum is characterized by a time constant of transferring heat to the environment [3] which is almost two times smaller than that for zirconium. These attractive properties of molybdenum can be used to create a new concept of a fuel element for thermal and fast reactors. This structural material is compatible with the well-known metallic uranium-molybdenum fuel good thermal properties of which are shown in table 3.

Rod fuel element with a small time constant τ_{th} for fast reactor and thermal reactor

As is known, fuel material of fuel elements of the world's first nuclear power plant built in the USSR (Obninsk) in 1954, was an alloy U-9%Mo. Molybdenum was chosen not only because it is able to stabilize γ -phase of uranium, but also because its alloy with uranium is characterized by a high thermal conductivity and high nuclear density of uranium (see table 3).

It can be seen that among materials presented in table 3, for creating a fuel element it is preferable to use dispersion fuel containing granules of a metal alloy U-9%Mo, dispersed into the molybdenum matrix. To improve the thermal contact of fuel with cladding, the latter also should be produced, for example, from Mo-based alloy [19].

Experimental studies [20] performed with a model nuclear fuel have confirmed the possibility of creating such a dispersion fuel (U-Mo - fuel granules, Mo - matrix) both in terms of compatibility over a wide temperature range of fuel granules, matrix and cladding, and at high fuel burn-up.

Since the thermal conductivity of fuel granules (U-9%Mo) is 2.8 times smaller than that of a molybdenum matrix, the average thermal conductivity of dispersion fuel material depends to a significant extent on the proportion of fuel granules, and on their forms. Assuming that fuel granules have a spherical shape, when their share $V_f = 0.5$ in dispersion fuel material, the average coefficient of thermal conductivity of the fuel rod is 71.5 W/(m·K) [18], and the time constant of the fuel element with a diameter $d = 9.1$ mm will be $\tau_{\text{th}} = 0.26$ sec (see table 3).

Prospects for the use of dispersion fuel elements with molybdenum as a structural material in fast reactors and corrosion resistance of molybdenum to lead and lead-bismuth eutectic

As for the apparent attractiveness of the possibility of using molybdenum and its alloys as a structural material in fast reactors (fuel - uranium-molybdenum alloy, the matrix material - molybdenum in dispersion fuel elements, cladding material - possibly also refractory material), the need for use of molybdenum enriched by light isotopes still requires to be considered.

It is known that molybdenum and its alloys are compatible with both aqueous coolant (in thermal reactors), and liquid metals Na, Pb and Pb-Bi [5,21,22,23,24,25,26,27] in fast reactors. Here some results of different studies, that shows high corrosion resistance to Pb and Pb-Bi coolants.

In work [27] The relative resistance of 21 metals and alloys to mass transfer in liquid lead has been

measured. Tests were performed in small, quartz thermal-convection loops. The test temperature was about 800°C, with a thermal gradient of 300 °C existing across the loops. All the metals and alloys studied, only niobium and molybdenum exhibited a high resistance to mass transfer (Figure 3). Neither of these metals suffered noticeable mass transfer or corrosion under the test conditions. A transverse section of the hot-leg specimen from a molybdenum loop is shown in Fig. 4.

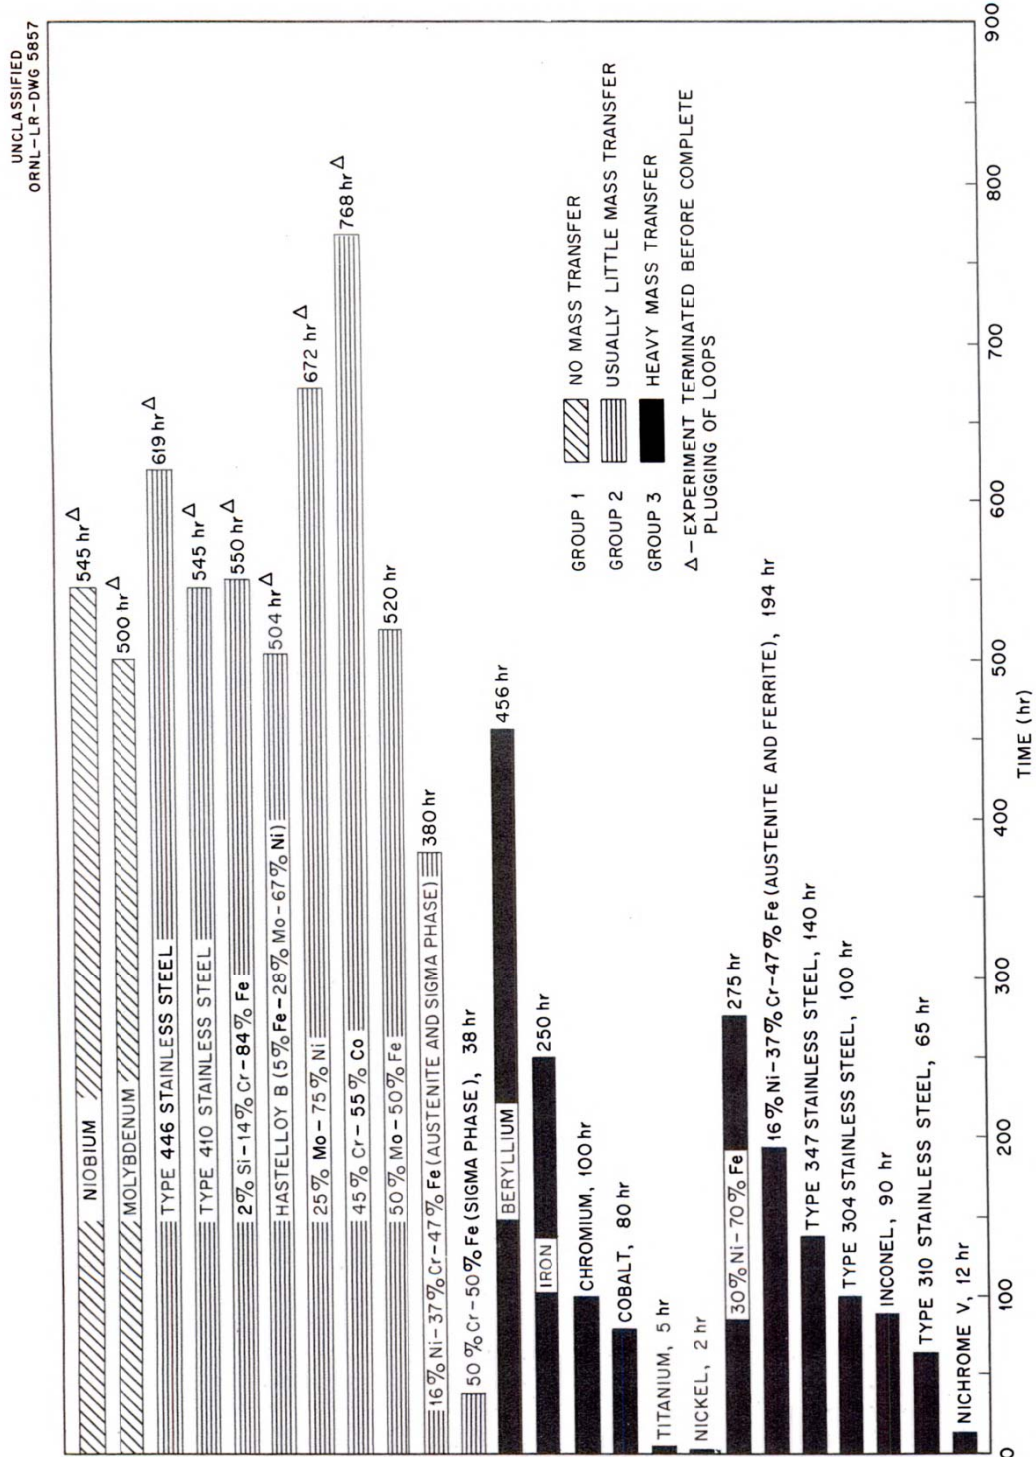


Figure 3: Mass transfer in liquid lead

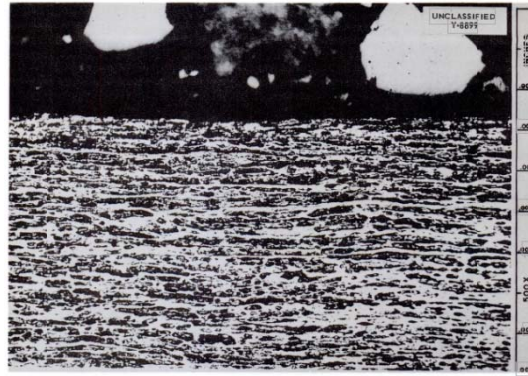


Figure 4 - Transverse Section of Hot-Leg Specimen from a Molybdenum Loop in Which Liquid Lead Was Circulated. 500X

The specimens of molybdenum were immersed in the stirred lead-bismuth for 1000 h, that was heated up to 700 °C [28]. Oxygen concentration was $5 \cdot 10^{-6}$ wt.%.

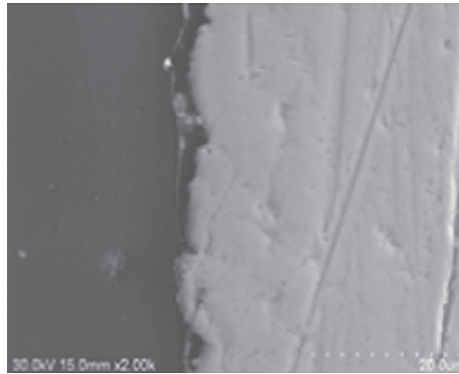


Figure 5 - SEM micrograph of Mo after immersion in 700 °C LBE for 1000 h

Fig. 5 shows the SEM micrograph of the cross section of the molybdenum. There is no significant weight change of the molybdenum specimen. These results show that after the immersion in high temperature LBE for 1000 h. At lower temperature, high corrosion resistance of molybdenum in liquid LBE has been also reported in another works. Fazio et al. (2003) reported that in flowing LBE at 400 °C molybdenum exhibited smooth surface with no evidence of LBE on the surface and growth of oxide layer. Hata and Takahashi (2005) reported that in the stirred LBE pool at 450 °C molybdenum had good corrosion resistance.

The result of the molybdenum after immersion in Pb–Bi is shown in Fig. 6 [29]. Oxygen concentration was 10^{-6} wt.%. (550 °C) - $2 \cdot 10^{-5}$ (800 °C)).

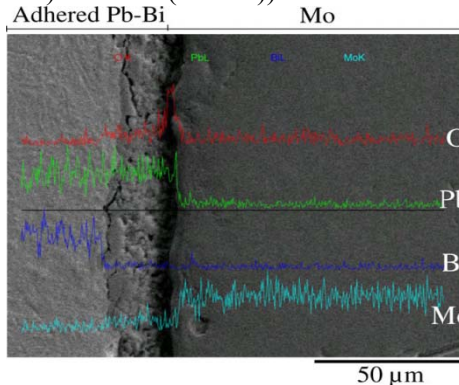


Figure: 6 SEM-EDX micrograph analysis of molybdenum after immersion in Pb–Bi at 550 °C for 12 h and then the temperature was increased up to 800 °C and kept there for 12 h

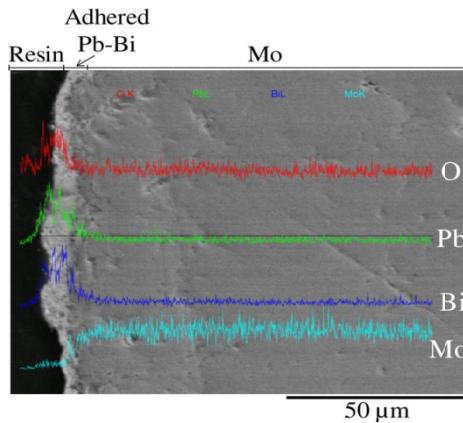


Figure 7 - SEM-EDX micrograph analysis of molybdenum after immersion in Pb-Bi at 550 °C for around 500 h and then the temperature was increased up to 800 °C and kept there for 15 h.

Fig. 7 shows the SEM-EDX micrograph analysis of the cross section of the molybdenum after immersion in Pb-Bi [29]. Oxygen concentration was 10^{-6} wt.% (550 °C - 800 °C).

The compatibility test was performed at 673 K and the corrosion and tensile results reported concern the first 1500-h run of the loop operation [30]. All the materials tested suffered from liquid metal attack exhibiting a weight loss. The consequent evaluation of the corrosion rate showed that, under the given test conditions, the refractory metals are more resistant than the steels. The measured weight loss of molybdenum sample was $9.1 \cdot 10^{-7}$ mg/mm² ($4.7 \cdot 10^{-5}$ μm/h). From a metallographic point of view, as is shown in the SEM micrograph of Fig. 8 metal exhibited an almost smooth interface with the lead-bismuth alloy. No evidence of liquid metal attack on the surface of material, or of the growth of an oxide layer, could be detected.

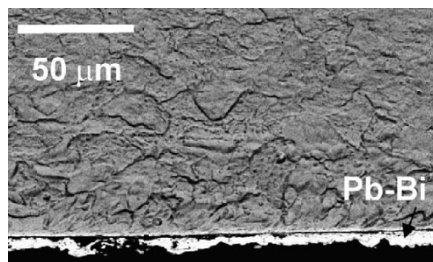


Figure 8: SEM – micrograph of the Mo cross section

The weight loss measured could be associated with both the uniform dissolution and the low solubility of Mo in Pb-Bi liquid at 673 K.

In another work [31] the specimens of molybdenum were immersed in the lead for 500 h, that was heated up to 700 °C. Oxygen concentration was $4.5 \cdot 10^{-7}$ wt.%.

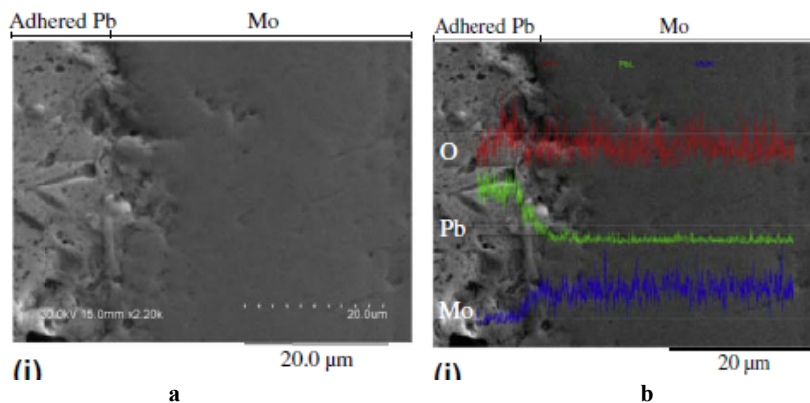


Figure 9 - SEM(a)-EDX(b) micrograph of cross section of tested molybdenum specimen after immersion in lead at 700 °C for 500 h

The figures 4, 5, 6, 7, 8, 9 shows that no penetration of Pb–Bi or Pb into the molybdenum matrix and no dissolution of molybdenum atoms from specimen into Pb–Bi/Pb. Moreover, no crack on the surface of the specimens after immersion in Pb–Bi/Pb under transient temperature up to 800 °C/700 °C was observed.

Fig. 8a shows that neither cracks nor a friable molybdenum oxide layer on the surface of the specimen occurred.

This results showed that the molybdenum exhibited high corrosion resistance to Pb–Bi up to 800 °C and to Pb up to 700 °C. In all this work molybdenum specimen has a purity of at least 99.95 wt.% .

However, it is important to note that in a core the combination of a high melting point liquid metal coolant (e.g., Pb, Pb-Bi et al.) and the fuel element with a cladding based on a refractory (molybdenum-based) material [19] and with a molybdenum matrix can significantly increase the stability of the core with respect to the possibility of a crisis in the heat transfer at a jump of reactivity. Using uranium-molybdenum fuel fits well into the concept of protected fuel cycle based on a mixture of ($^{233}\text{U} + ^{238}\text{U}$) [32].

If two heavy isotopes $^{98+100}\text{Mo}$ would be used for medicine purposes (these isotopes account for about 1/3 of the total of molybdenum), and two light isotopes $^{92+94}\text{Mo}$ would be used for reactor purposes (these isotopes account for about 1/4 of the total of molybdenum), then the total use of the isotopic molybdenum would be over 50%. The rest of the molybdenum without damage may be used in the national economy.

Summary conclusion

All the results presented above allowed us to make the following conclusions:

1. A method for reducing the time constant of the fuel elements allowing us to increase the safety of light water reactors and fast reactors by using dispersion fuel in cylindrical fuel elements containing, for example, granules of metallic U–Mo-alloy into Mo-matrix with enrichment by weakly absorbing molybdenum isotopes was proposed.

2. The use of the isotopic molybdenum would be more than 50%.

3. Molybdenum has the good resistance to lead and LBE.

Б.К. Қожахмет¹, Г.Г. Куликов², Г.С. Нурбакова¹, С.Б. Рустембаева¹

¹Әл- Фараби атындағы Қазақ Ұлттық Университеті, Алматы, Қазақстан ;

²Ұлттық Ядролық Зерттеу Университеті “МИТИ”, Мәскеу, Ресей

ҚАУІПСІЗДІКТІ ЖОҒАРЫЛАТУ ҮШІН, ҚОРҒАСЫН НЕМЕСЕ ҚОРҒАСЫН-ЕВТЕТИВТІ САЛҚЫНДАТЫЛҒАН ЖЫЛДАМ РЕАКТОРДА, ОТЫН ЭЛЕМЕНТТЕРІНІҢ ҚҰРЫЛЫМДЫҚ МАТЕРИАЛЫ РЕТІНДЕ МОЛИБДЕНДІ ПАЙДАЛАНУ

Аннотация. Зерттеудің негізгі мақсаты – ядролық реакторлардың қауіпсіздігін арттыру үшін, отын элементтерінің құрылымдық материалы ретінде, молибденді пайдалануды түсіндіру болып табылады. Қолданылған молибденнің ерекшелігі, оның изотоптық құрамы, қатерлі ісіктің медициналық диагностикасында пайдаланылатын, бөлу каскадының жұмысы кезінде қалдық ретінде алынған молибденнің құрамына сәйкес келеді.

Зерттеу барысында табиғи молибденнің нейтронды-физикалық қасиеттері (JENDL-4.0 ядролық деректер кітапханасы) және металл молибденінің жылулық қасиеттері пайдаланылды.

Келесі нәтижелер алынды:

1. Шар тәрізді микротвэлдарды пайдалану жолымен жүретін жеңіл сулы реакторлар үшін, сонымен қатар, молибденнің әлсіз жұтылатын изотоптарымен байытылған Мо-матрицасында металл U–Mo-түйіршіктерінің құймасынан тұратын, дисперсті отын пайдалану жолымен жүретін жылдам реакторлар үшін де, твэлдардың тұрақты уақытын азайту әдісі ұсынылған.

2. Молибденді әлсіз жұтылатын изотоптармен байытудың қажеттілігі көрсетілген.

3. Молибденнің изотоптық құрамының жалпы қолданылуы 50%-дан жоғары.

4. Мо-нің Pb және Pb-Bi евтетивінде коррозияға жақсы төзімділігі бар екендігін дәлелдейтін жұмыстарға шолу жасалынды.

Молибденнің әлсіз жұтылатын изотоптарымен байытылған Мо-матрицасында металл U–Mo-түйіршіктерінің құймасынан тұратын, цилиндр тәрізді отынды білікшелердегі дисперстік отынды пайдалану жолымен жүретін, жылу бөлетін элементтер твэлдарының тұрақты уақытын азайту, жеңіл сулы және жылдам ядролық реакторлардың қауіпсіздігін арттырудың лайықты тәсілі болуы мүмкін.

Түйін сөздер: жылдам реакторлардың қауіпсіздігін арттыру, молибденнің физика-механикалық сипаттамалары, жылу бөлетін элементтердің жылулық тұрақтысы, қорғасын мен LBE-дегі коррозияға төзімділігі.

Б.К. Кожакмет¹, Г.Г. Куликов², Г.С. Нурбакова¹, С.Б. Рустембаева¹

¹Казахский Национальный Университет имени Аль-Фараби, Алматы, Казахстан ;

²Национальный Исследовательский Ядерный Университет “МИФИ”, Москва, Россия

ИСПОЛЬЗОВАНИЕ МОЛИБДЕНА В КАЧЕСТВЕ СТРУКТУРНОГО МАТЕРИАЛА ТОПЛИВНЫХ ЭЛЕМЕНТОВ В СВИНЦЕВОМ ИЛИ СВИНЦЕВНОМ-ЭВТЕТИЧЕСКОМ ОХЛАЖДЕННОМ БЫСТРОМ РЕАКТОРЕ ДЛЯ ПОВЫШЕНИЯ ЕГО БЕЗОПАСНОСТИ

Аннотация. Основной целью исследования является обоснование использования молибдена в качестве конструкционного материала топливных элементов для повышения безопасности ядерных реакторов. Особенностью используемого молибдена является то, что его изотопный состав соответствует молибдену, который получается в качестве хвоста при работе разделительного каскада для изготовления материала для медицинской диагностики рака.

При проведении исследования использовались нейтронно-физические свойства изотопов природного молибдена (библиотека ядерных данных JENDL-4.0) и теплофизические свойства металлического молибдена.

Были получены следующие результаты:

1. Предложен способ уменьшения постоянной времени твэлов как для легководных реакторов путем использования шаровых микротвэлов, так и для быстрых реакторов путем использования дисперсного топлива, содержащего, например, гранулы металлического U-Mo - сплава в Mo - матрице с обогащением слабопоглощающими изотопами молибдена.

2. Показана необходимость обогащения молибдена слабо поглощающими изотопами.

3. Общее использование изотопного состава молибдена составит более 50%.

4. Выполнен обзор по работам, где доказывается, что Mo имеет хорошую коррозионную стойкость в Pb и эвтектике Pb-Bi.

Уменьшение постоянной времени твэлов тепловыделяющих элементов, путем использования дисперсионного топлива в цилиндрических топливных стержнях, содержащих, например, гранулы металлического U-Mo-сплава в Mo-матрице с обогащением слабо поглощающими изотопами молибдена, может оказаться заслуживающим внимание способом повышения безопасности легководных и быстрых ядерных реакторов.

Ключевые слова: повышение безопасности быстрых реакторов, физико-механические характеристики молибдена, тепловая постоянная тепловыделяющих элементов, коррозионная стойкость в свинце и LBE.

Information about authors:

Kozhakhmet B.K. - al-Farabi Kazakh National University, Almaty, Kazakhstan, 2nd course PhD student, bauyr.ko@gmail.com, ORCID: <https://orcid.org/0000-0001-6370-7511>

Kulikov G.G. - National Research Nuclear University, Moscow, Russia, professor, GeGKulikov@rosatom.ru, ORCID: <https://orcid.org/0000-0001-7580-2823>

Nurbakova G.S. - al-Farabi Kazakh National University, Almaty, Kazakhstan, c.ph.-m.sc., docent, g.nurbakova@gmail.com, ORCID: <https://orcid.org/0000-0001-5999-8635>

Rustembayeva S.B. - al-Farabi Kazakh National University, Almaty, Kazakhstan, 1st course PhD student, rustembayeva@gmail.com, ORCID: <https://orcid.org/0000-0001-9520-2518>

REFERENCES

[1] Kulikov G.G., Apse V.A., Kulikov E.G., Kozhakhmet B.K., Shkodin A.O. and Shmelev A.N. (2017). Radiogenic lead from poly-metallic thorium ores as a valuable material for advanced nuclear facilities. Kerntechnik: Vol. 82, No. 1, pp. 87-91.

[2] Kozhakhmet B.K., Kulikov G.G., Nurbakova G.S. (2018) Improvement of neutron-physical characteristics of BN-600 fast reactor by using ²⁰⁸Pb based neutron reflector. News of the National Academy of Sciences of the Republic of Kazakhstan. Physico-mathematical series. V.4, № 320, pp.22-35.

[3] Hummel H.H. and Okrent D. (1970) Reactivity Coefficients in Large Fast Power Reactors, American Nuclear Society, La Grange Park, Illinois, USA

[4] Kalin B.A., Platonov P.A., Tuzov Yu.V., Chernov I.I. and Shtrombakh Ya.I. (2012) Fizicheskoe materialovedenie: Uchebnik dlya vuzov, Vol. 6, Konstrukcionnye materialy yadernoy tekhniki, NRNU MEPhI, Moscow, Russia

- [5] Zelikman A.N. (1970) Molibden, Metallurgiya, Moscow, USSR.
- [6] Nikonov N. (2014) Molibden. Svoistva, primeneniye, proizvodstvo, produkciya. Metotekhnika. Russia
- [7] Perelman F.M., Zvorykin A.Ya. (1968) Molibden i volfram, Nauka, Moscow, USSR.
- [8] Morgunova N.N. etc (1975) Splavy molibdena, Metallurgiya, Moscow, USSR.
- [9] III Vsesouznnye soveshaniya po himii i tekhnologii molibdena i volframa (1977) Tezisy dokladov, Orjonikidze, USSR
- [10] Agte K., Vacek I. (1964) Volfram i molibden, Energiya, Leningrad, USSR
- [11] Plyushev V.E. (1961) Spravochnik po redkim metallam, Mir, Moscow, USSR
- [12] Grigor'ev I.S. and Meylikhov E.Z. (1991) Fizicheskie velichiny: Spravochnik, Energoatomizdat, Moscow, Russia
- [13] Wolter A., Reynolds A. (1986) Reaktory - razmnnojiteli na bystrykh neitronah: Per. s angl., Energoatomizdat, Moscow, USSR
- [14] Nelson A.T., Sooby E.S., Kim Y.J., Cheng B., Maloy S.A. (2013) High temperature oxidation of molybdenum in water vapor environments, Journal of nuclear materials
- [15] Gelles D.S., Peterson D.T., Bates J.F. (1981) Void swelling in the molybdenum alloy TZM irradiated to high fluence, Journal of nuclear materials, North-Holland publishing company
- [16] Cockeram B.V., Smith R.W., Hashimoto N., Snead L.L. (2011) The swelling microstructure, and hardening of wrought LCAC, TZM, and ODS molybdenum following neutron irradiation, Journal of nuclear materials
- [17] Smirnov A.Yu. and Sulaberidze G.A. (2014) Sravnenie sposobov obogascheniya promezhshutochnykh komponentov v kaskadakh iz odinakovogo chisla razdelitel'nykh komponentov, Atomnaya energiya 117 №5 pp 274–279
- [18] Baranov V.G., Godin Yu.G., Tenishev A.V., Khlunov A.V. and Novikov V. (2012) Fizicheskoe materialovedenie: Uchebnik dlya vuzov, Vol. 7, Yadernye toplivnye materialy, NRNU MEPhI, Moscow, Russia
- [19] Dolgov A.B., Novikov V.V. and Ivanov A.S. (2013) Novoye toplivo dlya VVER, Atomniy ekspert 6-7 pp 30–34
- [20] Shornikov D.P. (2008) Distinctive Features of Interaction of the U-Mo Fuel Composition Fission
- [21] Sorokin A.P., Kalyakin S.G. and Kozlov F.A. (2014) Visokotemperaturnaya yadernaya energotekhnologiya na osnove bistrikh reaktorov s natrievim teplonositelem dlya proizvodstva vodoroda, Atomnaya energiya 116 №4 pp 194–283
- [22] Gromov B.F., Demishonkov A.P. and Toshinskiy G.I. (1993) Patent of RF №2066710 Class C23F 11/00 Date of filing 10.03.1993, Products and the Al Matrix with Barrier Coating Proc. of the 12th International Conference on Research Reactor Fuel Management pp 26–29 [Sposob zashchity konstruktsionnykh materialov ot korrozii pri povyshennykh temperaturakh v zhidkom svintse, vismute i ikh splavakh]
- [23] Vasko A.T., Kovach S.K. (1983) Elektrokhiimiya tugoplavki metallov, Tekhnika, Kiev, USSR
- [24] Shreir L.L. (1976) Corrosion. Volume 1: Metal / Environment Reactions Hardcover, Newnes-Butterworths, ISBN 0408001097
- [25] Gulyaev A.P. (1982) Korrosionnostoikie splavy tugoplavki metallov, Nauka, Moscow, USSR
- [26] Tufanov D.G. (1990) Korrosionnaya stoikost' nerzhavushchikh stalei, splavov i chistykh metallov, Metallurgiya, Moscow, USSR
- [27] Cathcart J.V., Manly W.D., (1956) The Mass Transfer Properties of Various Metals and Alloys in Liquid Lead, CORROSION, 12(2):43-47.
- [28] Rivai A.K., Takahashi M. (2008) Compatibility of surface-coated steels, refractory metals and ceramics to high temperature lead - bismuth eutectic, Progress in nuclear energy, 560-566
- [29] Rivai A.K., Takahashi M. (2008) Corrosion characteristics of materials in Pb-Bi under transient temperature conditions, Journal of nuclear materials
- [30] Fazio C., Ricipito I., Scaddozzo G., Benamati G. (2003) Corrosion behaviour of steels and refractory metals and tensile features of steels exposed to flowing PbBi in the LECOR loop, Journal of nuclear materials, 325-332.
- [31] Rivai A.K., Takahashi M. (2009) Corrosion investigations of Al-Fe-coated steels, high Cr steels, refractory metals and ceramics in lead alloys at 700 °C, Journal of nuclear materials
- [32] Shmelev A.N., Kulikov G.G., Kulikov E.G. and Apse V.A. (2014) O potentsiale gibridnykh (sintezdelenie) narabotnikov topliva dlya yadernykh reaktorov: stabilizirovannye razmnnozhayushchie svoystva, glubokoe vygoranie, zashchislennoe toplivo, NRNU MEPhI, Moscow.

**Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

<http://physics-mathematics.kz/index.php/en/archive>

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Редакторы *М. С. Ахметова, Т.А. Апендиев, Д.С. Аленов*
Верстка на компьютере *А.М. Кульгинбаевой*

Подписано в печать 10.06.2019.
Формат 60x881/8. Бумага офсетная. Печать – ризограф.
8,3 п.л. Тираж 300. Заказ 3.

Национальная академия наук РК
050010, Алматы, ул. Шевченко, 28, т. 272-13-18, 272-13-19