

ISSN 2518-1726 (Online),
ISSN 1991-346X (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
Әль-фараби атындағы Қазақ ұлттық университетінің

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Қазақстан Республикасының Ғылым
Академиясының Әль-Фараби
атаулы Қазақ ұлттық университетінің

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Al-farabi kazakh
national university

SERIES
PHYSICO-MATHEMATICAL

6(328)

NOVEMBER – DECEMBER 2019

PUBLISHED SINCE JANUARY 1963

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

Бас редакторы
ф.-м.ғ.д., проф., ҚР ҰҒА академигі **Ғ.М. Мұтанов**

Р е д а к ц и я а л қ а с ы:

Жұмаділдаев А.С. проф., академик (Қазақстан)
Кальменов Т.Ш. проф., академик (Қазақстан)
Жантаев Ж.Ш. проф., корр.-мүшесі (Қазақстан)
Өмірбаев У.У. проф. корр.-мүшесі(Қазақстан)
Жүсіпов М.А. проф. (Қазақстан)
Жұмабаев Д.С. проф. (Қазақстан)
Асанова А.Т. проф. (Қазақстан)
Бошкаев К.А. PhD докторы (Қазақстан)
Сұраған Д. корр.-мүшесі (Қазақстан)
Quevedo Hernando проф. (Мексика),
Джунушалиев В.Д. проф. (Қырғыстан)
Вишневский И.Н. проф., академик (Украина)
Ковалев А.М. проф., академик (Украина)
Михалевич А.А. проф., академик (Белорус)
Пашаев А. проф., академик (Әзірбайжан)
Такибаев Н.Ж. проф., академик (Қазақстан), бас ред. орынбасары
Тигиняну И. проф., академик(Молдова)

«ҚР ҰҒА Хабарлары. Физика-математикалық сериясы».

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы»РҚБ (Алматы қ.)

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде
01.06.2006 ж. берілген №5543-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18, <http://physics-mathematics.kz/index.php/en/archive>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2019

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Главный редактор
д.ф.-м.н., проф. академик НАН РК **Г.М. Мутанов**

Редакционная коллегия:

Джумадильдаев А.С. проф., академик (Казахстан)
Кальменов Т.Ш. проф., академик (Казахстан)
Жангаев Ж.Ш. проф., чл.-корр. (Казахстан)
Умирбаев У.У. проф., чл.-корр. (Казахстан)
Жусупов М.А. проф. (Казахстан)
Джумабаев Д.С. проф. (Казахстан)
Асанова А.Т. проф. (Казахстан)
Бошкаев К.А. доктор PhD (Казахстан)
Сураган Д. чл.-корр. (Казахстан)
Quevedo Hernando проф. (Мексика),
Джунушалиев В.Д. проф. (Кыргызстан)
Вишневский И.Н. проф., академик (Украина)
Ковалев А.М. проф., академик (Украина)
Михалевич А.А. проф., академик (Беларусь)
Пашаев А. проф., академик (Азербайджан)
Такибаев Н.Ж. проф., академик (Казахстан), зам. гл. ред.
Тигиняну И. проф., академик (Молдова)

«Известия НАН РК. Серия физико-математическая».

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Собственник: РОО «Национальная академия наук Республики Казахстан» (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов
Министерства культуры и информации Республики Казахстан №5543-Ж, выданное 01.06.2006 г.

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://physics-mathematics.kz/index.php/en/archive>

© Национальная академия наук Республики Казахстан, 2019

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75.

Editor in chief
doctor of physics and mathematics, professor, academician of NAS RK **G.M. Mutanov**

E d i t o r i a l b o a r d :

Dzhumadildayev A.S. prof., academician (Kazakhstan)
Kalmenov T.Sh. prof., academician (Kazakhstan)
Zhantayev Zh.Sh. prof., corr. member. (Kazakhstan)
Umirbayev U.U. prof. corr. member. (Kazakhstan)
Zhusupov M.A. prof. (Kazakhstan)
Dzhumabayev D.S. prof. (Kazakhstan)
Asanova A.T. prof. (Kazakhstan)
Boshkayev K.A. PhD (Kazakhstan)
Suragan D. corr. member. (Kazakhstan)
Quevedo Hernando prof. (Mexico),
Dzhunushaliyev V.D. prof. (Kyrgyzstan)
Vishnevskiy I.N. prof., academician(Ukraine)
Kovalev A.M. prof., academician(Ukraine)
Mikhalevich A.A. prof., academician(Belarus)
Pashayev A. prof., academician(Azerbaijan)
Takibayev N.Zh. prof., academician (Kazakhstan), deputy editor in chief.
Tiginyanu I. prof., academician(Moldova)

News of the National Academy of Sciences of the Republic of Kazakhstan. Physical-mathematical series.

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 5543-Ж, issued 01.06.2006

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://physics-mathematics.kz/index.php/en/archive>

© National Academy of Sciences of the Republic of Kazakhstan, 2019

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

PHYSICO-MATHEMATICAL SERIES

ISSN 1991-346X

<https://doi.org/10.32014/2019.2518-1726.68>

Volume 6, Number 328 (2019), 5 – 13

UDC 536.46:532.517.4

IRSTI 29.03.77; 29.03.85

**A.S. Askarova¹⁻², S.A. Bolegenova¹, P. Safarik³,
V.Yu. Maximov¹, A.O. Nugymanova^{1*}, S.A. Bolegenova²**

¹ al-Farabi Kazakh National University, Faculty of Physics and Technology, Almaty, Kazakhstan;

² Science Research Institute of Experimental and Theoretical Physics
of al-Farabi Kazakh National University, Almaty, Kazakhstan;

³ Czech Technical University in Prague, Faculty of Fluid Dynamics and Thermodynamics, Prague, Czech Republic

E-mail.com: aliya.askarova@kaznu.kz, saltanat.bolegenova@kaznu.kz, pavel.safarik@fs.cvut.cz,
valeriy.maximov@kaznu.kz, bolegenova.symbat@kaznu.kz, aizhan.nugymanova@kaznu.kz

3D MODELING OF HEAT TRANSFER PROCESSES IN THE COMBUSTION CHAMBER BOILER OF THERMAL POWER PLANTS

Abstract. In the present work, a computer-aided 3D modeling method was used to conduct a comprehensive study of heat and mass transfer processes in turbulent flows of high-temperature reactive media in real geometry. Numerical computations of the thermal processes and aerodynamic characteristics of the flow were made for the combustion chamber of the BKZ-75 boiler at Shaktinskaya thermal power plant for combustion of high-ash fuel. Using the methods of computer 3D-modeling, we took into account a great number of phenomena and factors affecting the real technological processes in the combustion chambers of industrial facilities. The aerodynamic picture of the studied combustion chamber was obtained, the temperature fields and energy distributions released due to chemical reactions were constructed, and the values of radiation heat fluxes to the main heat-receiving surfaces of the combustion chamber were determined. The results of numerical calculations can be used to design new and modernize existing combustion chambers of industrial boilers working on solid fuel, as they are based on the most advanced physical and mathematical models in this area. The use of modern technologies for 3D numerical computations of solid fuel combustion in the combustion chambers of thermal power plants, will allow us to describe in detail the fields of velocity, temperature, pressure and concentrations of all combustion products and, above all, harmful substances and other characteristics of the coal combustion process throughout the combustion space and at the outlet of the combustion chamber.

Key words. Combustion, modelling, thermal power plant, high ash coal.

Introduction

The study of combustion at the level of mathematical modeling is an intermediate link between research conducted at the level of engineering practice and fundamental science [1-3]. It becomes necessary to create new models that will allow us to make more accurate calculations of the fields of velocity, temperature and concentration of the main components of fuel and combustion products in systems such as combustion chambers, various combustion devices, etc. Limitations of theoretical methods and complexity of experimental investigations predetermined a significant role of numerical methods and numerical computations in the study of complex flows of reacting liquids [4-8]. Though, in most cases, mathematical studies are carried out in one- and two-dimensional approximations, and only in rare cases three-dimensional models are used [9-12], moreover, numerical computations are made with constraints in the computational domain. The first results of three-dimensional modeling of heat and mass transfer processes in the combustion chambers of real power facilities of the Republic of Kazakhstan are presented in [13-16]. So the study of the heat transfer processes in furnaces becomes particularly important.

Lately, whole complexes of programs are created, allowing to carry out numerical studies of the most complex phenomena, which include processes of convective heat and mass transfer in high-temperature

and chemically reactive flows in the presence of fast-flowing physical and chemical transformations of substances. For this purpose, commercial packages of universal programs that use the latest achievements of computer technology, mathematics, combustion, heat and mass transfer have been developed and applied [17-19].

Modeling of coal combustion

In the present work, physical-mathematical and chemical models were used to study heat and mass transfer in high-temperature environments [20-22]. These models include a system of three-dimensional Navies - Stokes equations and heat and mass transfer equations, considering the source terms determined by the chemical kinetics of the process, nonlinear effects of thermal radiation, interfacial interaction, and multi-stage chemical reactions. The basic equations used to solve the problem are:

The equation for turbulent kinetic energy dissipation ε :

$$\frac{\partial(p\varepsilon)}{\partial t} = -\frac{\partial(pu_j\varepsilon)}{\partial x_j} + \frac{\partial}{\partial x_j} \left[\frac{\mu_{eff}}{\sigma_\varepsilon} \frac{\partial \varepsilon}{\partial x_j} \right] + C_{\varepsilon,1} * \frac{\varepsilon}{k} * P - C_{\varepsilon,2} * \frac{\varepsilon^2}{k} * p \quad (1)$$

where $p\varepsilon$ is transformation of kinetic energy pulsations into internal energy (dissipation); $\sigma_k, \sigma_\varepsilon$ are turbulent Prandtl numbers.

The basic equations used in this work can be written in generalized form as follows:

$$\begin{aligned} \frac{\partial(p\phi)}{\partial t} = & -\frac{\partial(pu_1\phi)}{\partial x_1} - \frac{\partial(pu_2\phi)}{\partial x_2} - \frac{\partial(pu_3\phi)}{\partial x_3} + \frac{\partial}{\partial x_1} \left[\Gamma_\phi \frac{\partial \phi}{\partial x_1} \right] + \\ & \frac{\partial}{\partial x_2} \left[\Gamma_\phi \frac{\partial \phi}{\partial x_2} \right] + \frac{\partial}{\partial x_3} \left[\Gamma_\phi \frac{\partial \phi}{\partial x_3} \right] + S_\phi \end{aligned} \quad (2)$$

where ϕ is a transport variable; S_ϕ is the source term determined by the chemical kinetics of the process, nonlinear effects of thermal radiation, interphase interaction and multi-stage chemical reactions. The above system of equations is solved numerically using the control volume method described in detail in [21-24] and used in numerical computations of high-ash coal combustion in Kazakhstan's thermal power plants.

To solve the problem, the mathematical model should include specific initial and boundary conditions for desired functions (velocity, temperature, concentration of the mixture components, etc.) corresponding to the geometry of the selected combustion chamber and the real technological process of fuel combustion at TPPs.

Initial conditions: $u = 0, v = 0, w = 0, P = 0$, at $t = 0$.

The boundary conditions are set on the free surfaces, which are the burners, the exit from the furnace chamber of the boiler and the plane of symmetry.

Input: u_i are speed values, c_β is the initial concentration of each component, the enthalpy h is determined by the input flow temperature from the following relation:

$$C_P = \frac{\partial h}{\partial T} \quad (3)$$

where T is the temperature at the inlet (experiment or calculation).

Output: $\left. \frac{\partial u_i}{\partial x_i} \right|_{normalA} = 0, \left. \frac{\partial h}{\partial x_i} \right|_{normalA} = 0, \left. \frac{\partial c_\beta}{\partial x_i} \right|_{normalA} = 0$ are derivatives of velocity, enthalpy and concentration of components normal to the output plane.

In the plane of symmetry: $u_i|_{normalS} = 0$ is the velocity normal to the plane of symmetry, $\frac{\partial u_i}{\partial x_i}|_{normalS} = 0$, $\frac{\partial h}{\partial x_i}|_{normalS} = 0$, are the derivatives of velocity and enthalpy normal to the plane of symmetry, $\frac{\partial h}{\partial x_i}|_{taS} = 0$ is the derivative of the enthalpy tangential to the plane of symmetry, $\frac{\partial c_\beta}{\partial x_i}|_{normalS} = 0$ is the derivative of component concentrations normal to the plane of symmetry.

On the solid surface: $u_i|_{normalB} = 0$, $\frac{\partial u_i}{\partial x_i}|_{normalB} = 0$, $u_i|_{taB} = 0$, $\partial p|_{boundary} = 0$ is the correction for pressure on the border of the solid surface, $\frac{\partial c_\beta}{\partial x_i}|_{normalB} = 0$.

The boundary conditions for the temperature on the wall are determined by the convective heat flux $q_w = \alpha(T_{Steam} - T_{Surf})$. In case of variable temperature of the wall of the combustion chamber, the heat flux can be calculated by the formula:

$$\dot{q} = \underbrace{\alpha(T_{FG} - T_{Surf})}_{convection} + \underbrace{C_{12}(T_{FG}^4 - T_{Surf}^4)}_{radiation} \quad (4)$$

where $C_{12} = \varepsilon_{12}\sigma$, T_{FG} is the temperature of the flue gases, T_{Surf} is the surface temperature of the chamber wall, α is the coefficient of heat transfer by convection, $W/(m^2K)$, ε_{12} is the emissivity wall, σ is the Boltzmann constant, $W/(m^2K^4)$.

In this work the radiant heat exchange was calculated using the flux model described in [25-26]. The modeling method was developed by Lockwood, Shah [25] and De Marco, Lockwood [26].

Results of numerical computations

As the object of research has been chosen the boiler BKZ-75 (Fig. 2) located at Shakhtinskaya TPP (Kazakhstan) [27-30]. For numerical simulation, the entire computational domain is divided by a difference grid into discrete points or volumes (Fig. 2b). The resulting finite-difference grid has the resolution of $110 \times 61 \times 150$ or 1 006 500 control volumes [31-36].

This paper presents the results of calculations give changes in the velocity and radiant vectors in the sections of the combustion chamber and the temperature profile shown in Figs. 3-5.

Fig. 3 illustrates the three-dimensional distribution of the full velocity vector in the volume of the combustion chamber. An analysis of Fig. 3a shows that the flow of the air mixture with combustion products has a vortex character in the region of the burners and in the lower part of the combustion chamber. In the center of the combustion chamber, the flux forms several vortices with the presence of a return flow up and down the space of the combustion chamber (Fig. 3b).


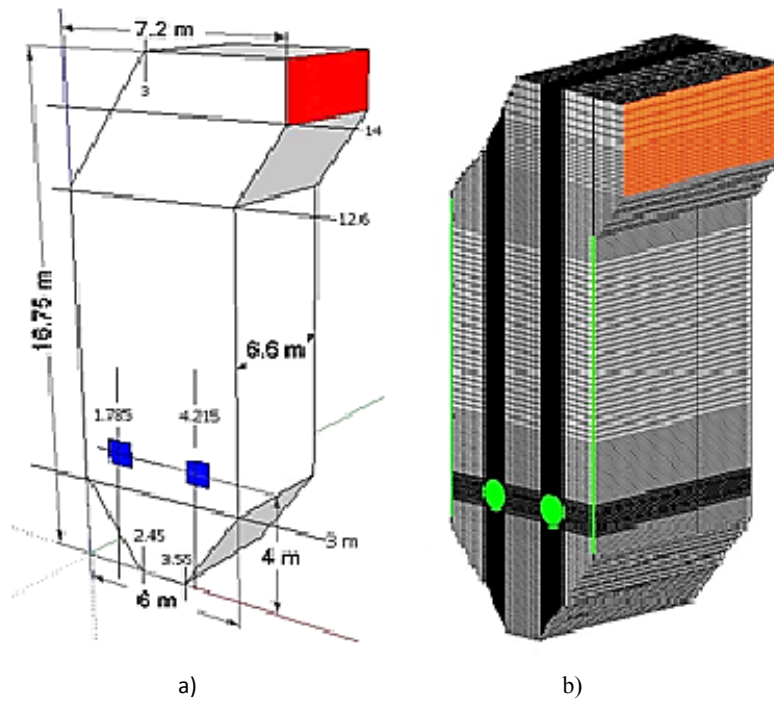



Figure 2 - General view of the BKZ-75 boiler at the Shakhtinskaya TPP a) and its discretization for control volumes b)

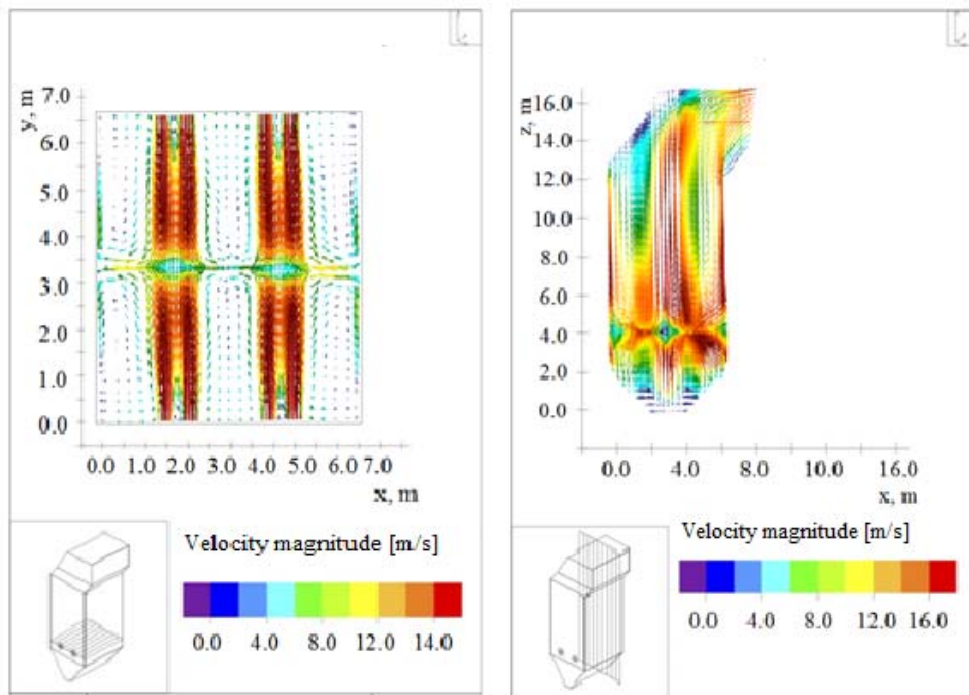

a) cross section ($z = 4.0$ m),

b) longitudinal section ($y = 3.3$ m)

Figure 3 - Velocity distribution in the combustion chamber

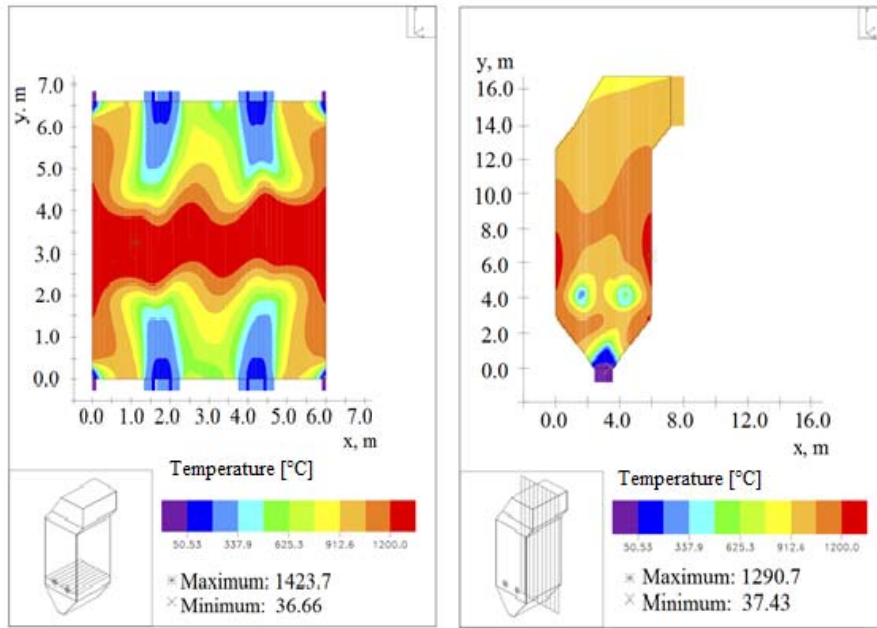

a) cross section ($z=4.0$ m) b) longitudinal section ($y=3.3$ m)

Figure 4 - Temperature distribution in the combustion chamber

Fig. 4 shows the temperature distributions characterizing thermal behavior of a pulverized coal flow in the studied combustion chamber. It can be noted that the temperature reaches its maximum values in the region close to the location of the burners, because here, due to the vortex character of the flow, a maximum convective transfer is observed and, as a result, the residence time of coal particles increases, which leads to an increase in temperature in this zone.

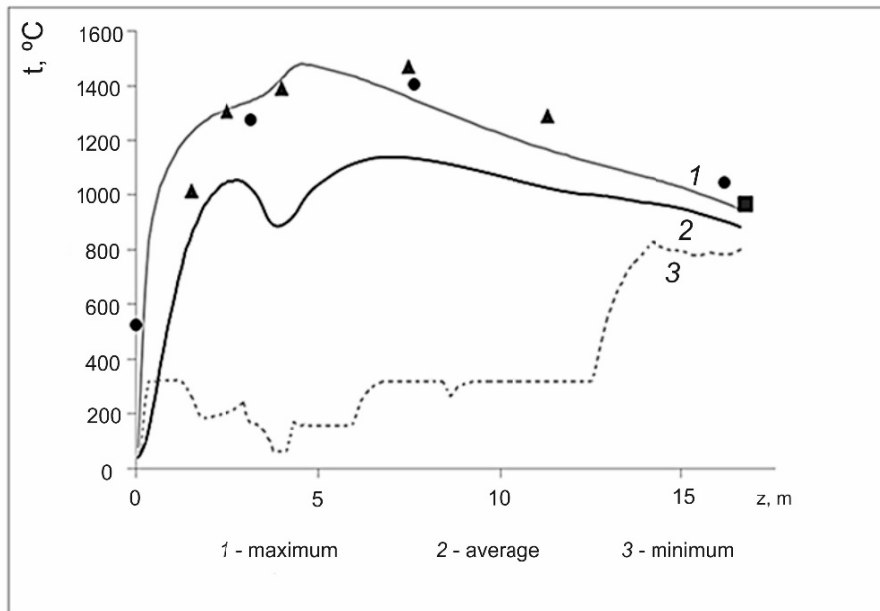


Figure 5 -Temperature distribution along the height of the furnace chamber

Lines correspond to numerical computations; ■ are theoretical values obtained by the method of thermal calculation (CBTI – Central Boiler-and-Turbine Institute) [37]; ▲, ● are the experimental data obtained at the thermal power plant [38-39]

Analysis of Fig. 5 shows that the results of numerical simulation of temperature dependence on the height of the combustion chamber agree with enough accuracy with the theoretical values obtained by the method of thermal calculations suggested by CBTI (Central Boiler-Turbine Institute) [37] and the data obtained directly at TPP [38-39]. This enables us to assess the reliability of the obtained results and the applicability of the physical, mathematical and numerical model to further study of thermal characteristics of the BKZ-75.

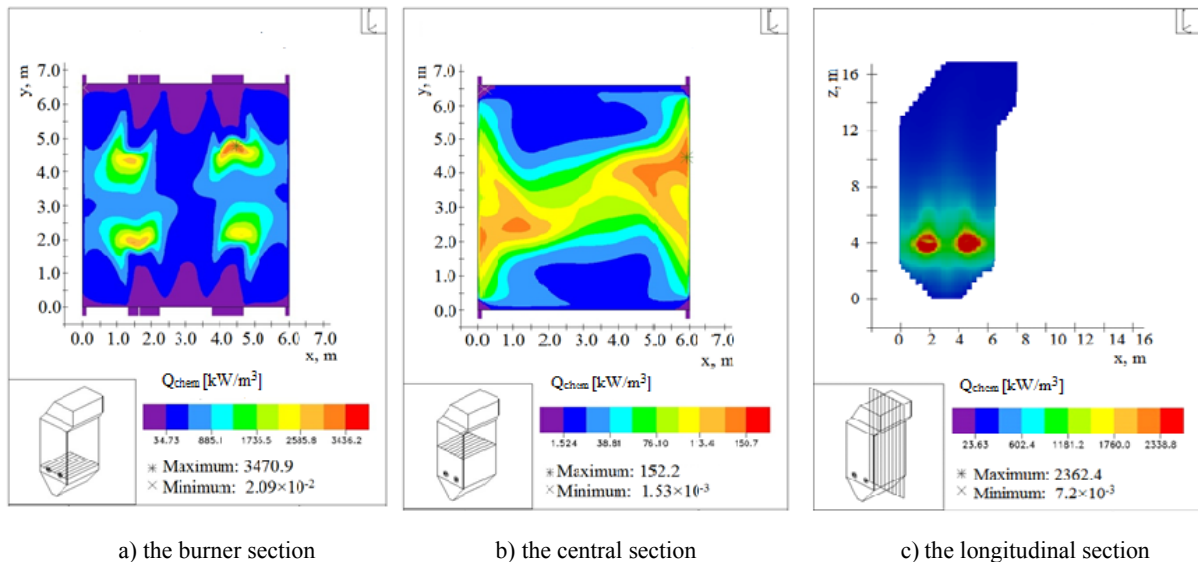


Figure 6 - Energy distribution in chemical reactions

As a result of numerical simulation, the energy distribution of chemical reactions in the main sections of the furnace space, the radiation vector profiles in the central sections of the furnace and the distribution of the radiant energy flow to the walls of the combustion chamber were obtained.

The Fig. 6 illustrations that chemical reactions with the highest heat release occur in the fuel and oxidizer supply, i.e. near the installation of burners. In this area mixing of combustible substances and oxygen in the air reaches its maximum level due to intensive mixing, turbulent pulsations and a vortex flow character. This in turn contributes to an increase in the rate of the chemical reaction of carbon oxidation with the release of the maximum amount of energy ($Q_{chem} = 3470.9 \text{ kW/m}^3$).

Conclusion

Based on the results of us study, the following conclusions can be drawn:

- The temperature reaches its maximum values in the area close to the location of burners as here, due to the vortex character of the flow, the maximum convective transfer is observed and as a result, the residence time of coal particles increases, which leads to an increase in the temperature in this zone.
- The energy released by chemical reactions reaches its maximum value 3470.9 kW/m^3 in the section of burners. In central part of the combustion chamber this value is 152.2 kW/m^3 .
- The physical and mathematical model used in the numerical calculations adequately describes burning of high-ash coal in the combustion chamber of the BKZ 75-39 boiler at Shakhtinskaya TPP, Kazakhstan. The obtained results are in good agreement with the experimental data, which were obtained specially at the thermal power station.

Acknowledgements

This work was supported by Ministry of Education and Science of the Republic of Kazakhstan (grants AP05132988 and AP05133590 and BR05236730).

А.С. Асқарова^{1,2}, С.Ә. Бөлегенова^{1,2}, П. Шафаржик³,
В.Ю. Максимов¹, А.О. Нұғыманова^{1*}, С.Ә. Бөлегенова²

¹ Әл-Фараби атындағы Қазақ ұлттық университетін физика-техникалық факультеті,
әл-Фараби атындағы ҚазҰУ, Алматы, Қазақстан;

² Әл-Фараби атындағы Қазақ ұлттық университетіне қарасты эксперименталдық және теориялық физиканың
ғылыми-зерттеу институты, әл-Фараби атындағы ҚазҰУ ЭТФ ФЗИ, Алматы, Қазақстан;

³ Прага қ. Чех Техникалық университетінің сұйық динамикасы мен термодинамика факультеті,
Прага қ. Чех Техникалық университеті, Прага, Чех Республикасы

ЖЫЛУ ЭЛЕКТР СТАНЦИЯЛАРЫНЫҢ ЖАНУ ҚАЗАНЫНДА ЖЫЛУ АЛМАСУ ПРОЦЕСТЕРІН 3D МОДЕЛЬДЕУ

Аннотация. Бұл жұмыста нақты геометрия аймақтарында (ЖЭС, ЖЭО) жоғары температурадағы әсер ететін ортадағы турбулентті ағындарында жылу және масса тасымалының процестерін жан-жақты зерттеу үшін компьютерлік 3D модельдеу әдісі пайдаланылды. Шахтинск ЖЭО зауытындағы БКЗ-75 қазандықтың жану камерасында жылу процестерін және ағынның аэродинамикалық сипаттамаларын зерттеуге арналған есептік эксперименттер жоғары күлді жанармайдың жануы кезінде жүргізілді. Компьютерлік 3D модельдеу әдістерін пайдаланған кезде өндірістік объектілердің жану камераларында нақты технологиялық үрдістер ағынынна әсер ететін құбылыстар мен факторлардың ең көп саны ескерілді. Зерттелетін жану камерасының аэродинамикалық сұлбесі ұсынылған, химиялық реакциялар арқылы пайда болатын температура өрістері мен энергия бөлу, сондай-ақ жану камерасының негізгі жылу алатын беттеріне радиациялық жылу ағындарының мәндері алынады. Орындалған есептеу эксперименттерінің нәтижелері қатты отынмен жұмыс істейтін өнеркәсіптік қазандықтардың жану камераларын жаңа және жобалау кезінде, физикалық және математикалық модельдер осы саладағы ғылымның даму деңгейіне арналған ең толық, заманауи және оңтайлы болып табылады мүмкін. Жану камерасында жылу электр станцияларының жану камераларында қатты отынды жағу бойынша 3D есептеу эксперименттеріне арналған заманауи технологияларды қолдану барлық жану өнімдерінің, сонымен бірге жану аймағындағы жанғыш көмір процесінің зиянды заттар мен басқа да сипаттамаларының жылдамдығын, температурасын, қысымын және концентрациясын егжей-тегжейлі сипаттауға мүмкіндік береді.

Түйін сөздер. Жылу масса алмасу, жану, қатты отын, плазмалық активация, аэродинамикалық ағыс, концентрация және температура өрісі, зиянды заттардың қалдықтары.

А.С. Асқарова^{1,2}, С.А. Бөлегенова^{1,2}, П. Шафарик³,
В.Ю. Максимов¹, А.О. Нұғыманова^{1*}, С.А. Бөлегенова²

¹Казахский Национальный Университет имени аль-Фараби, физико-технический факультет,
г. Алматы, Казахстан;

² Научно-исследовательский институт экспериментальной и теоретической физики (НИИЭТФ),
г. Алматы, Казахстан;

³ Чешский технический университет в Праге, факультет динамики жидкости и термодинамики,
г. Прага, Чешская Республика

3D-МОДЕЛИРОВАНИЕ ПРОЦЕССОВ ТЕПЛООБМЕНА В КАМЕРЕ СГОРАНИЯ КОТЛА ТЕПЛОВЫХ ЭЛЕКТРИЧЕСКИХ СТАНЦИЙ

Аннотация. В настоящей работе методами компьютерного 3D-моделирования проведено комплексное исследование процессов тепломассопереноса в турбулентных течениях высокотемпературных реагирующих сред в областях реальной геометрии (ТЭС, ТЭЦ). Вычислительные эксперименты по исследованию тепловых процессов и аэродинамических характеристик течения проведены в топочной камере котла БКЗ-75 Шахтинской ТЭЦ при сгорании в ней высокозольного энергетического топлива. При использовании методов компьютерного 3D-моделирования учтено наибольшее количество явлений и факторов, влияющих на протекание реальных технологических процессов в камерах сгорания промышленных объектов. Представлена аэродинамическая картина исследуемой топочной камеры, построены температурные поля и распределения энергии, выделяющейся за счет химических реакций, а также получены значения радиационных тепловых потоков на основные тепловоспринимающие поверхности камеры сгорания. Результаты проведенных вычислительных экспериментов, могут быть использованы при проектировании новых и доработке существующих топочных камер промышленных котлов, использующих твердое топливо, поскольку используемые физико-математические модели являются наиболее полными, современными и оптимальными для данного уровня развития науки в этой области. Применение современных технологий для проведения 3D-вычислительных экспериментов по сжиганию твердого топлива в топочных камерах ТЭС, позволит подробно описать поля скорости, температуры, давления и концентраций всех продуктов сжигания и прежде всего вредных веществ и других характеристик процесса сжигания угля по всему топочному пространству и на выходе из топочной камеры.

Ключевые слова. Тепломассоперенос, горение, твердое топливо, плазменная активация, аэродинамика течения, концентрационные и температурные поля, выбросы вредных веществ.

Information about authors:

Askarova Aliya – Doctor of Physical and Mathematical Sciences, Professor, Head of the Laboratory for Simulation of Heat and Mass Transfer, al-Farabi Kazakh National University. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation. The author approved the final version of the article before submitting it for publication. E-mail: aliya.askarova@kaznu.kz;

Bolegenova Saltanat – Doctor of Physics and Mathematics, Professor, Head of the Department of Thermophysics and Technical Physics, al-Farabi Kazakh National University. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation. The author approved the final version of the article before submitting it for publication. E-mail: Saltanat.bolegenova@kaznu.kz;

Safarik Pavel – Doctor of Physics and Mathematics, Professor at the Czech Technical University in Prague, Prague, Czech Republic. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation. E-mail: Pavel.Safarik@fs.cvut.cz;

Maximov Valeriy – PhD, Senior Lecturer, Department of Thermal Physics and Technical Physics, al-Farabi Kazakh National University. The author has written the first version of the article or its critical review for important intellectual content. E-mail: valeriy.maximov@kaznu.kz;

Nugymanova Aizhan – PhD student, Senior Lecturer, Department of Thermal Physics and Technical Physics, al-Farabi Kazakh National University. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation. E-mail: aizhan.nugymanova@kaznu.kz;

Bolegenova Symbat – PhD, deputy dean for educational, methodical and educational work Al-Farabi Kazakh National University. The author has written the first version of the article or its critical review for important intellectual content. E-mail: Symbat.bolegenova@kaznu.kz

REFERENCES

- [1] Baktybekov KS, Syzdykov AB, Ospanova Sh, etc (2018) Investigation of the different Reynolds numbers influence on the atomization and combustion processes of liquid fuel. *Bulgarian Chemical Communications*, 50(G):68–77.
- [2] Askarova A, Bolegenova S, Shortanbaeva ZhK, etc (2017) Numerical modeling of burning pulverized coal in the combustion chamber of the boiler PK 39. *News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical*, 2(312):58-63.
- [3] Nugymanova A, Yergaliyeva A, Shortanbayeva Zh, etc (2017) Simulation of the aerodynamics and combustion of a turbulent pulverized-coal flame. *Proceedings of 4th International Conference on Mathematics and Computers in Sciences and Industry (MCSI 2017)*. Corfu Island, Greece. P.92-97. DOI: 10.1109/MCSI.2017.23.
- [4] Bolegenova SA, Maxutkhanova AM, Beisenov KhI, etc (2017) A computational experiment for studying the combustion of thermochemically-gasified coal in the combustion chamber of the boiler BKZ-160. *News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical*, 2(312):78-80 DOI: 10.1515/eng-2018-0020.
- [5] Askarova AS, Bekmukhamet A, etc (2012) Mathematical simulation of pulverized coal in combustion chamber. *Procedia Engineering*, 42:1150-1156. DOI: 10.1016/j.proeng.2012.07.507.
- [6] Safarik P, Beketayeva MT, etc (2018) Modern computing experiments on pulverized coal combustion processes in boiler furnaces. *News of the national academy of sciences of the Republic of Kazakhstan-series Physico-mathematical*, 6(322): 5-14 DOI: 10.32014/2018.2518-1726.11.
- [7] Beketayeva MT, Ergalieva A, Gabitova Z, etc (2016) Computational modeling of heat and mass transfer processes in combustion chamber at power plant of Kazakhstan. *Proceedings MATEC Web of Conferences*, 76:UNSP06001 DOI:10.1051/mateconf/20167606001.
- [8] Mazhrenova NR, Bolegenova SA, Mamedova MR, etc (2019) Computational experiments for research of flow aerodynamics and turbulent characteristics of solid fuel combustion process. *News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical*, 2(324):46–52. <https://orcid.org/10.32014/2019.2518-1726.11>
- [9] Bolegenova SA, Beketayeva MT, Askarova A, etc (2018) Modeling of heat and mass transfer in high-temperature reacting flows with combustion. *Journal High Temperature*, 56(5):738-745. DOI: 10.1134/S0018151X1805005X.
- [10] Aldiyarova AN, Boranbayeva AE, Maksutkhanova AM, etc (2016) Mathematical modeling of heat and mass transfer in the presence of physical-chemical processes. *Proceeding of 15th international scientific conference on renewable energy and Innovate Technologies, Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications*, 48(E):272-277.
- [11] Bekmukhamet A, Beketayeva MT, Gabitova ZKh, etc (2015) Computational method for investigation of solid fuel combustion in combustion chambers of a heat power plant. *Journal High Temperature*, 5(5):751-757. DOI: 10.1134/S0018151X15040021.
- [12] Safarik P, Maximov VYu, Bolegenova SA, etc (2019) 3D modeling of combustion thermochemical activated fuel. *News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical*, 2(324):9–16. <https://orcid.org/10.32014/2019.2518-1726.7>
- [13] Boranbayeva A, Manatbayev R, Maxutkhanova A, etc (2016) Application of 3D modelling for solving the problem of combustion coal-dust flame. *Proceeding of 15th international scientific conference on renewable energy and Innovate Technologies, Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications*, 48(E):236-241.
- [14] Baizhuma ZhT, Yergaliyeva AB, Manatbayev RK, etc (2018) The use of a new “clean” technology for burning low-grade coal in on boilers of Kazakhstan TPPs. *Bulgarian Chemical Communications*, 50(G):53 – 60.
- [15] Nagibin, AO, Messerle VE, etc (2010) Pulverized coal torch combustion in a furnace with plasma-coal system. *Journal Thermophysics and Aeromechanics*, 17(3):435-444. DOI: 10.1134/S0869864310030145
- [16] Messerle VE, Ustimenko AB, Maksimov VYu, etc (2014) Numerical simulation of the coal combustion process initiated by a plasma source. *Journal Thermophysics and Aeromechanics*, 21(6):747-754. DOI: 10.1134/S0869864314060092.

- [17] Messerle VE, Karpenko EI, Ustimenko AB, etc (2006) Plasma enhancement of combustion of solid fuels. *Journal of High Energy Chemistry*, 40(2):111-118. DOI: 10.1134/S0018143906020081.
- [18] Ospanova S, Bolegenova S, Ergalieva A, etc (2016) 3D modeling of heat and mass transfer during combustion of solid fuel in BKZ-420-140-7C combustion chamber of Kazakhstan. *Journal of Applied Fluid Mechanics*, 9(2):699-709.
- [19] Buchmann M, Askarowa A (1997) Structure of the flame of fluidized-bed burners and combustion processes of high-ash coal. Proceedings of 18th Dutch-German Conference on Flames, VDI Berichte, 1313:241-244.
- [20] Manatbayev RK, Beketayeva MT, Yergaliyeva AB, etc (2016) CFD study of harmful substances production in coal-fired power plant of Kazakhstan. Proceedings of 15th International Scientific Conference on Renewable Energy and Innovative Technologies: Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications, 48(E2):260-265.
- [21] Müller H. (1992) Numerische Berechnung Dreidimensionaler Turbulenter Strömungen in Dampferzeugern Mit Wärmeübergang und Chemischen Reaktionen am Beispiel des SNCR-Verfahrens und der Kohleverbrennung: Fortschritt-Berichte VDI-Verlag, 6(268):158 (in German).
- [22] Incropera FP, DeWitt DP. (1981) Fundamentals of Heat and Mass Transfer. Second Edition. John Wiley & Sons. New York.
- [23] Chernetsky MYu., Kuznetsov VA., etc (2016) Comparative Analysis of the Effect of Turbulence Models on the Description of the Processes of Burning Coal Dust in the Presence of Flow Swirling. *Journal Thermal Physics and Aeromechanics*, 23(4):615 - 626
- [24] Askarova A, Chtab-Desportes A, Voloshina I, etc (2010) Stochastic simulation of the spray formation assisted by a high pressure. *AIP Conference Proceedings*, 1207:66-73
- [25] Lockwood F, Shah N. (1976) An Improved Flux Model for Calculation of Radiation Heat Transfer in Combustion Chambers. Proceedings of the ASME-AIChE Heat transfer Conference: ASME-Paper, Salt Lake City, 2-7.
- [26] De Marco A, Lockwood F (1975) A New Flux Model for the Calculation of Radiation Furnaces. *Italian Flame Days*, Sanremo, 1-13.
- [27] Gabitova ZKh, Messerle VE, Ustimenko AB, etc (2015) Numerical simulation of pulverized coal combustion in a power boiler furnace. *Journal High Temperature*, 53(3):445-452. DOI: 10.1134/S0018151X15020030.
- [28] Vockrodt S, Leithner R, Schiller A, (1999) Firing technique measures for increased efficiency and minimization of toxic emissions in Kasakh coal firing. Proceedings of 19th German Conference on Flames, Dresden, Germany VDI Gesell Energietechn; Verein Deutsch Ingn. Combustion and incineration, 1492:93-97. (in Eng).
- [29] Karpenko EI, Karpenko YeE, Ustimenko AB, etc (2007) Mathematical modeling of the processes of solid fuel ignition and combustion at combustors of the power boilers. Proceedings of the 7th International Fall Seminar on Propellants, Explosives and Pyrotechnics, Xian, 7:672-683.
- [30] Askarova A, Bolegenova SA, Ospanova ShS, etc (2017) Investigation of aerodynamics and heat and mass transfer in the combustion chambers of the boilers PK-39 and BKZ-160. News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical, 2(322):5-14.
- [31] Berezovskaya I, Ospanova S., Shortanbayeva Zh, etc (2016) 3D modelling of heat and mass transfer processes during the combustion of liquid fuel, Proceedings of 15th International Scientific Conference on Renewable Energy and Innovative Technologies, Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications, 48(E):229-235.
- [32] Maximov VYu, Messerle VE, Ustimenko AB, etc (2016) Reduction of noxious substance emissions at the pulverized fuel combustion in the combustor of the BKZ-160 boiler of the Almaty heat electro power station using the "Overfire Air" technology. *Journal Thermophysics and Aeromechanics*, 23(1):125-134. DOI: 10.1134/S0869864316010133.
- [33] Ospanova ShS., <mailto:maximov.v@mail.ru> Bekmukhamet A, etc (2012) Numerical research of aerodynamic characteristics of combustion chamber BKZ-75 mining thermal power station. *Procedia Engineering*, 42:1250-1259. DOI: 10.1016/j.proeng.2012.07.517.
- [34] Bekmukhamet A, Beketayeva M, Gabitova Z, etc (2014) Control harmful emissions concentration into the atmosphere of megacities of Kazakhstan Republic. International conference on Future Information Engineering, Beijing, Peoples China, 10:252-258. DOI: 10.1016/j.ieri.2014.09.085.
- [35] Nugmanova A, Berezovskaya I, Gabitova Z etc (2017) Experimental study of complex combustion progress in higher education. Proceedings of 2nd International conference on Education, Management and Systems, Beijing, Peoples China, 377-381.
- [36] Ospanova ShS, Manatbayev RK, Beketayeva MT, etc (2018) The computational study of heat and mass transfer processes at combustion of pulverized kazakh coal in real conditions of energy objects. *Journal Bulgarian Chemical Communications*, 50(G):61- 67.
- [37] Mitor VV, Kuznecov NV, Dubovsky IE, etc. (1973) Thermal Calculation of Boiler Units. Normative Method. Moscow. Energy, 297.
- [38] Alijarov BK, Alijarova MB (2012) Szhiganie kazahstanskikh uglej na TJeS i na krupnyh kotel'nyh: opyt i perspektivy. RGP Gylym ordasy, Kazakhstan.
- [39] Alijarov BK, (1996) Soveshenstvovanie szhiganija jekibastuzskogo uglja na teplovyh elektrostancijah, RGP Gylym ordasy, Kazakhstan.

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

(Правила оформления статьи для публикации в журнале смотреть на сайтах:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

<http://physics-mathematics.kz/index.php/en/archive>

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Редакторы *М. С. Ахметова, Т. А. Апендиев, Д. С. Аленов*
Верстка на компьютере *А. М. Кульгинбаевой*

Подписано в печать 12.12.2019.
Формат 60x881/8. Бумага офсетная. Печать – ризограф.
9,6 п.л. Тираж 300. Заказ 6.